



► **Ultra**  
Unit heaters

# Ultra

Ceiling-mounted unit for heating, cooling and ventilation in large, high-end interiors


► **Technical catalogue**



# Contents

|  |           |
|--|-----------|
| <b>01 ▶ Product information</b>  | <b>6</b>  |
| ▶ Overview   | 7         |
| ▶ Product data   | 8         |
| ▶ Selection guide  | 9         |
| ▶ Ultra at a glance  | 10        |
| <b>02 ▶ Technical data</b>   | <b>12</b> |
| ▶ General  | 13        |
| ▶ Ultra - Unit design Heating, Model 73                                | 14        |
| ▶ Ultra - Unit design Heating, Model 84                                | 16        |
| ▶ Ultra - Unit design Heating or cooling, Model 84                     | 18        |
| ▶ Ultra - Unit design Heating, Model 85                                | 20        |
| ▶ Ultra - Unit design Heating or cooling, Model 85                     | 22        |
| ▶ Ultra - Unit design Heating Model 96                                 | 24        |
| ▶ Ultra - Unit design Heating or cooling, Model 96                     | 26        |
| <b>03 ▶ Design information</b>   | <b>28</b> |
| ▶ Types of installation – recirculating air installation               | 29        |
| ▶ Information on planning and design                                   | 30        |
| ▶ Hybrid ECO System  | 35        |
| ▶ Combination example: two Ultra units with KaCompact ventilation unit | 36        |
| <b>04 ▶ Control</b>  | <b>38</b> |
| ▶ Control of Ultra – electromechanical model                           | 39        |
| ▶ Control of Ultra – KaControl model                                   | 49        |
| ▶ KaControl – integration into intelligent building networks (IoT)     | 55        |
| ▶ KaControl – system controller  | 56        |
| <b>05 ▶ Ordering information</b>                                       | <b>58</b> |
| ▶ Ultra  | 58        |
| ▶ Accessories  | 60        |



A modern, multi-level interior space featuring a prominent staircase with glass railings and a ceiling-mounted ventilation unit. The staircase has a dark metal frame and glass railings, with a wooden handrail. The ceiling is white with a grid pattern, and a large, rectangular ventilation unit is mounted on it. The floor is made of dark, square tiles. Large windows are visible in the background, allowing natural light to enter the space. The overall design is clean and minimalist.

Ultra: Ceiling-mounted unit for heating, cooling, ventilation in large, high-end interiors. Meets the most exacting demands in terms of design and comfort.





ILLENBERGER Steinmetz GmbH,  
Nattheim – Steinweiler  
Stone masonry firm with a wide product  
range and forward-looking approach.



# 01 ▶ Product information

---



## Ultra – For greater energy efficiency and comfort in large spaces

Kampmann Ultra with EC fans are high-performance, energy-saving and ErP-compliant.

The Ultra is now equipped with the most energy-efficient drive concept through the use of EC technology, and can now be used wherever energy needs to be saved over the long term.

Ultra are used as ceiling-mounted units, either as heating and / or cooling models, for recirculating air or primary air operation in:

- ▶ retail chains
- ▶ showrooms and shop floors
- ▶ entrance halls
- ▶ retail stores with add-on accessories for installation in raised ceilings and acoustic grid ceilings 625 x 625 mm (600 x 600 mm on request)
- ▶ spaces with a ceiling height of between 2.3 m and 4.0 m

The Ultra product range includes 4 models for heating and 3 models for heating / cooling. The height of every model is only 330 mm.

Different heat exchangers and fans are fitted depending on the size (73, 84, 85, 96) and model (heating or heating/cooling) (refer to "Selection guide" on page 9).


### Operating principle

Air is drawn in through the axial fan and is blown through the circular heat exchanger into the room. The heated or cooled air is guided into the room on-demand through the pre(settable) louvre slats. Models with large heat exchanger capacity are ideal for use with low water temperatures.

### Scope of delivery

- ▶ intake crown for air intake supplied as standard for ease of fitting on site; brackets are fitted
- ▶ 6-sided air outlet, slats can be pre-set at six defined angles

### Heating example

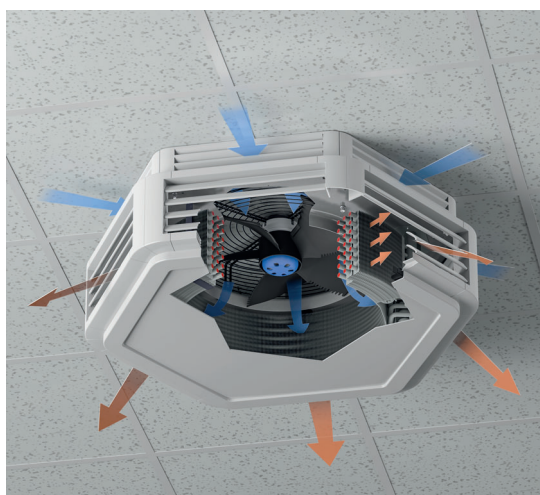

### Cooling example





# Product data



## Product benefits

- ▶ Minimal height due to circular heat exchanger
- ▶ Hexagonal housing design for optimum air distribution for heating and cooling
- ▶ Whisper-quiet sickle-blade fan with energy-efficient EC technology complies with ErP requirements
- ▶ Identical design of unit for recirculation air, mixed air or primary air mode, whether heating or cooling units
- ▶ All housing parts in plastic, therefore less weight, traffic white RAL 9016 (can be coated)
- ▶ Eurokonus valve connection - hygiene-certified to VDI 6022
- ▶ Hybrid ECO system module for decentralised temperature control



## Features

- ▶ Plastic housing in RAL 9016
- ▶ Supplied as standard with intake crown
- ▶ Air guidance slats can be engaged in six positions
- ▶ Continuously variable single-phase EC motor
- ▶ Extensive range of control accessories

|                     |  |
|---------------------|--|
| <b>Installation</b> | ▶ Ceiling-mounted  |
| <b>Air stream</b>   | ▶ Recirculating air<br>▶ Mixed air and primary air (on request)    |
| <b>Heating</b>      | ▶ LPHW   |
| <b>Cooling</b>      | ▶ CHW<br>▶ Refrigerants (on request)                               |
| <b>Hybrid Eco</b>   | ▶ In conjunction with primary or secondary air spigots, on request |
| <b>KaControl</b>    | ▶ Optional   |

## Performance data

|  |                    |
|--|--------------------|
| <b>Heat output [kW]<sup>1)</sup></b>             | ▶ 5.9 – 53.7       |
| <b>Cooling output [kW]<sup>2)</sup></b>          | ▶ 3.0 – 13.9       |
| <b>Sound pressure level [dB(A)]<sup>3)</sup></b> | ▶ 11 – 64          |
| <b>Sound power level [dB(A)]</b>                 | ▶ 27 – 80          |
| <b>Heat exchanger</b>                            | ▶ copper/aluminium |

<sup>1)</sup> at LPHW 75/65 °C,  $t_{11} = 20$  °C

<sup>2)</sup> at CHW 7/12 °C,  $t_{11} = 27$  °C, 48% relative humidity

<sup>3)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 3 m, a room volume of 2000 m<sup>3</sup> and a reverberation time of 1.0 s (in accordance with VDI 2081).

### Operating limits

- ▶ Max. operating pressure: 16 bar
- ▶ Max. entering water temperature: 90 °C
- ▶ Min. entering water temperature: 4 °C
- ▶ Max. air inlet temp.: 40 °C
- ▶ Max. glycol volume: 50 %

## Applications

Buildings of all kinds, which are to be ideally heated and ventilated with centralised or decentralised control.



## Selection guide




| Fan version                         | Model | Width (A)<br>[mm] | Dimensions<br>Depth (B)<br>[mm] | Height (C)<br>[mm] | Heat exchanger model<br>copper/aluminium |                                      |                                      |                    |
|-------------------------------------|-------|-------------------|---------------------------------|--------------------|--|--------------------------------------|--------------------------------------|--------------------|
|                                     |       |                   |                                 |                    | Heat output <sup>1)</sup><br>[kW]        | Cooling output <sup>2)</sup><br>[kW] | Cooling output <sup>3)</sup><br>[kW] | Air flow<br>[m³/h] |
| EC fan, 200-240 V,<br>high speed    | 73    | 840               | 750                             | 330                | 6.5 – 15.7                               | ---                                  | ---                                  | 580 – 1470         |
|                                     | 84    | 1004              | 900                             |                    | 5.9 – 20.3                               | 3.0 – 7.5                            | 1.4 – 3.7                            | 490 – 1850         |
|                                     | 85    |                   |                                 |                    | 7.3 – 33.3                               | 3.7 – 12.0                           | 1.7 – 5.7                            | 530 – 2980         |
|                                     |       |                   |                                 |                    | 10.2 – 53.7                              | 5.1 – 12.3                           | 2.2 – 8.7                            | 670 – 5640         |
| EC fan, 200-240 V,<br>reduced speed | 96    | 1177              | 1050                            |                    | 8.2 – 40.1                               | 4.3 – 13.9                           | 1.6 – 6.7                            | 420 – 3940         |

<sup>1)</sup> at LPHW 75/65 °C,  $t_{L1} = 20$  °C

<sup>2)</sup> at CHW 7/12 °C,  $t_{L1} = 27$  °C, 48% relative humidity

<sup>3)</sup> at CHW 16/18,  $t_{L1} = 27$  °C, 48% relative humidity

### Technical drawing (Dimensions in mm)

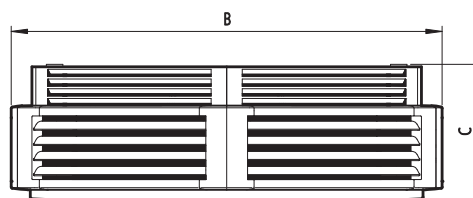
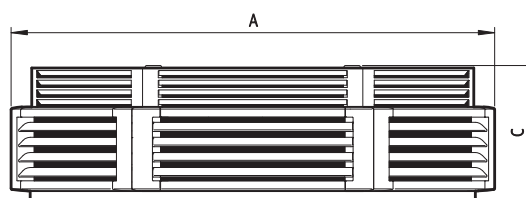
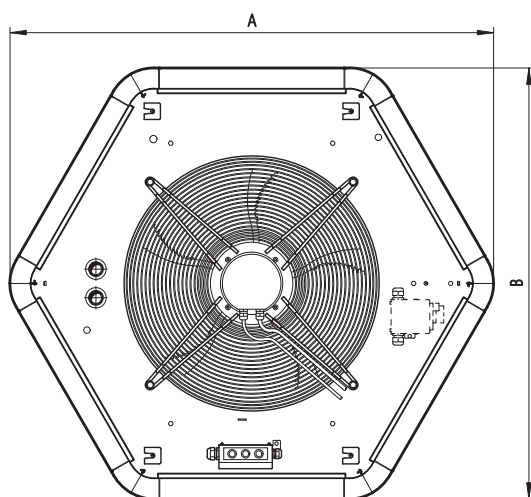


## Ultra at a glance




VDI 6022  
Conformity  
confirmed

## Features

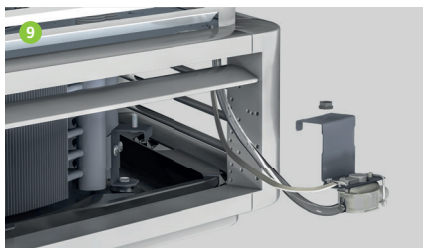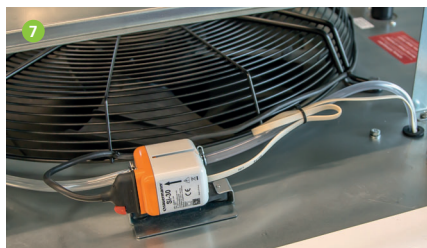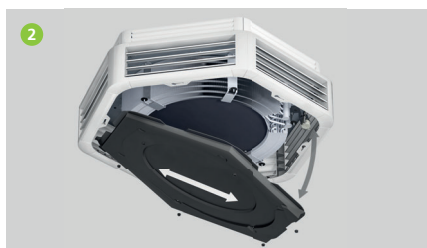

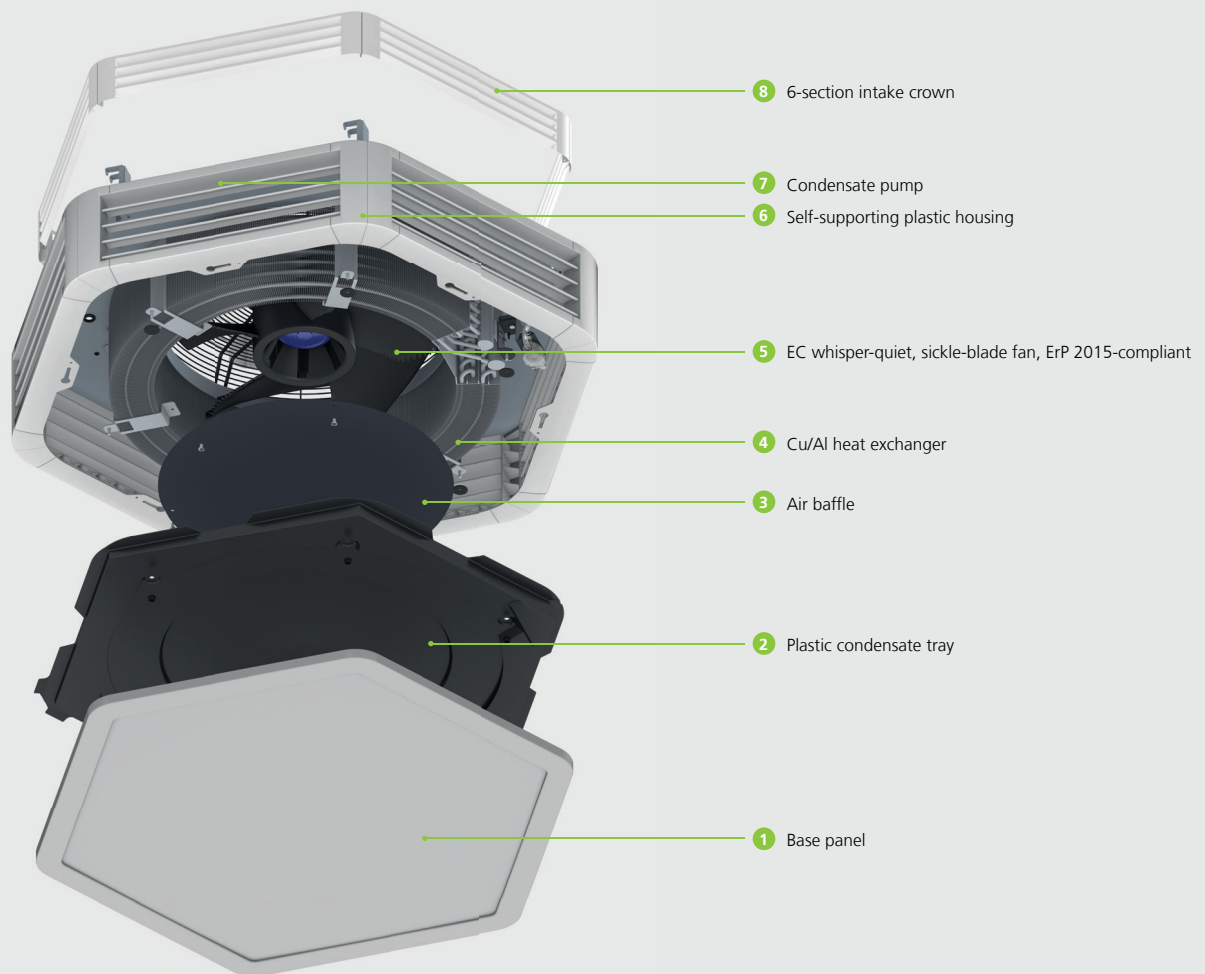

**1 Base panel**

- › easily removable for maintenance

**2 Plastic condensate tray**

- › maintenance-friendly, thanks to external pump sump with outlet spigots
- › simply dismantled by means of plug-in quick fixing mechanism

**3 Air baffle**

- › for optimum flow through the heat exchanger

**4 Heat exchanger**

- › consists of round copper tubes in a circular design with aluminium fins bonded by expansion
- › steel collector and manifold, corrosion-proof, suitable for LPHW up to 90 °C and 16 bar continuous operating pressure
- › connections through the top of the unit
- › suitable for low water temperature heating systems

**5 EC whisper-quiet, sickle-blade fan, ErP 2015-compliant:**

- › continuously variable EC single-phase whisper-quiet sickle-blade fan
- › excellent efficiency due to the aerodynamic design of the blade geometry
- › motor protection: IP 54
- › balanced at 2 levels; balancing quality according to G 6, 3 DIN ISO 1940 part 1
- › external rotor motor integrated in the fan impeller
- › complies with the ErP Directive (EU) 327/2011 ("LOT 11")

**6 Self-supporting plastic housing**

- › traffic white RAL 9016
- › with 6-sided air outlet
- › 45 mm wide air flow fins, pre-adjustable to six defined setting angles

**7 Condensate pump**

- › pre-assembled in the factory with the heating / cooling model


**8 6-section intake crown**

- › easy to fit

**9 Pump sump with float switch easily accessible through the discharge grille**

## 02 ► Technical data

---

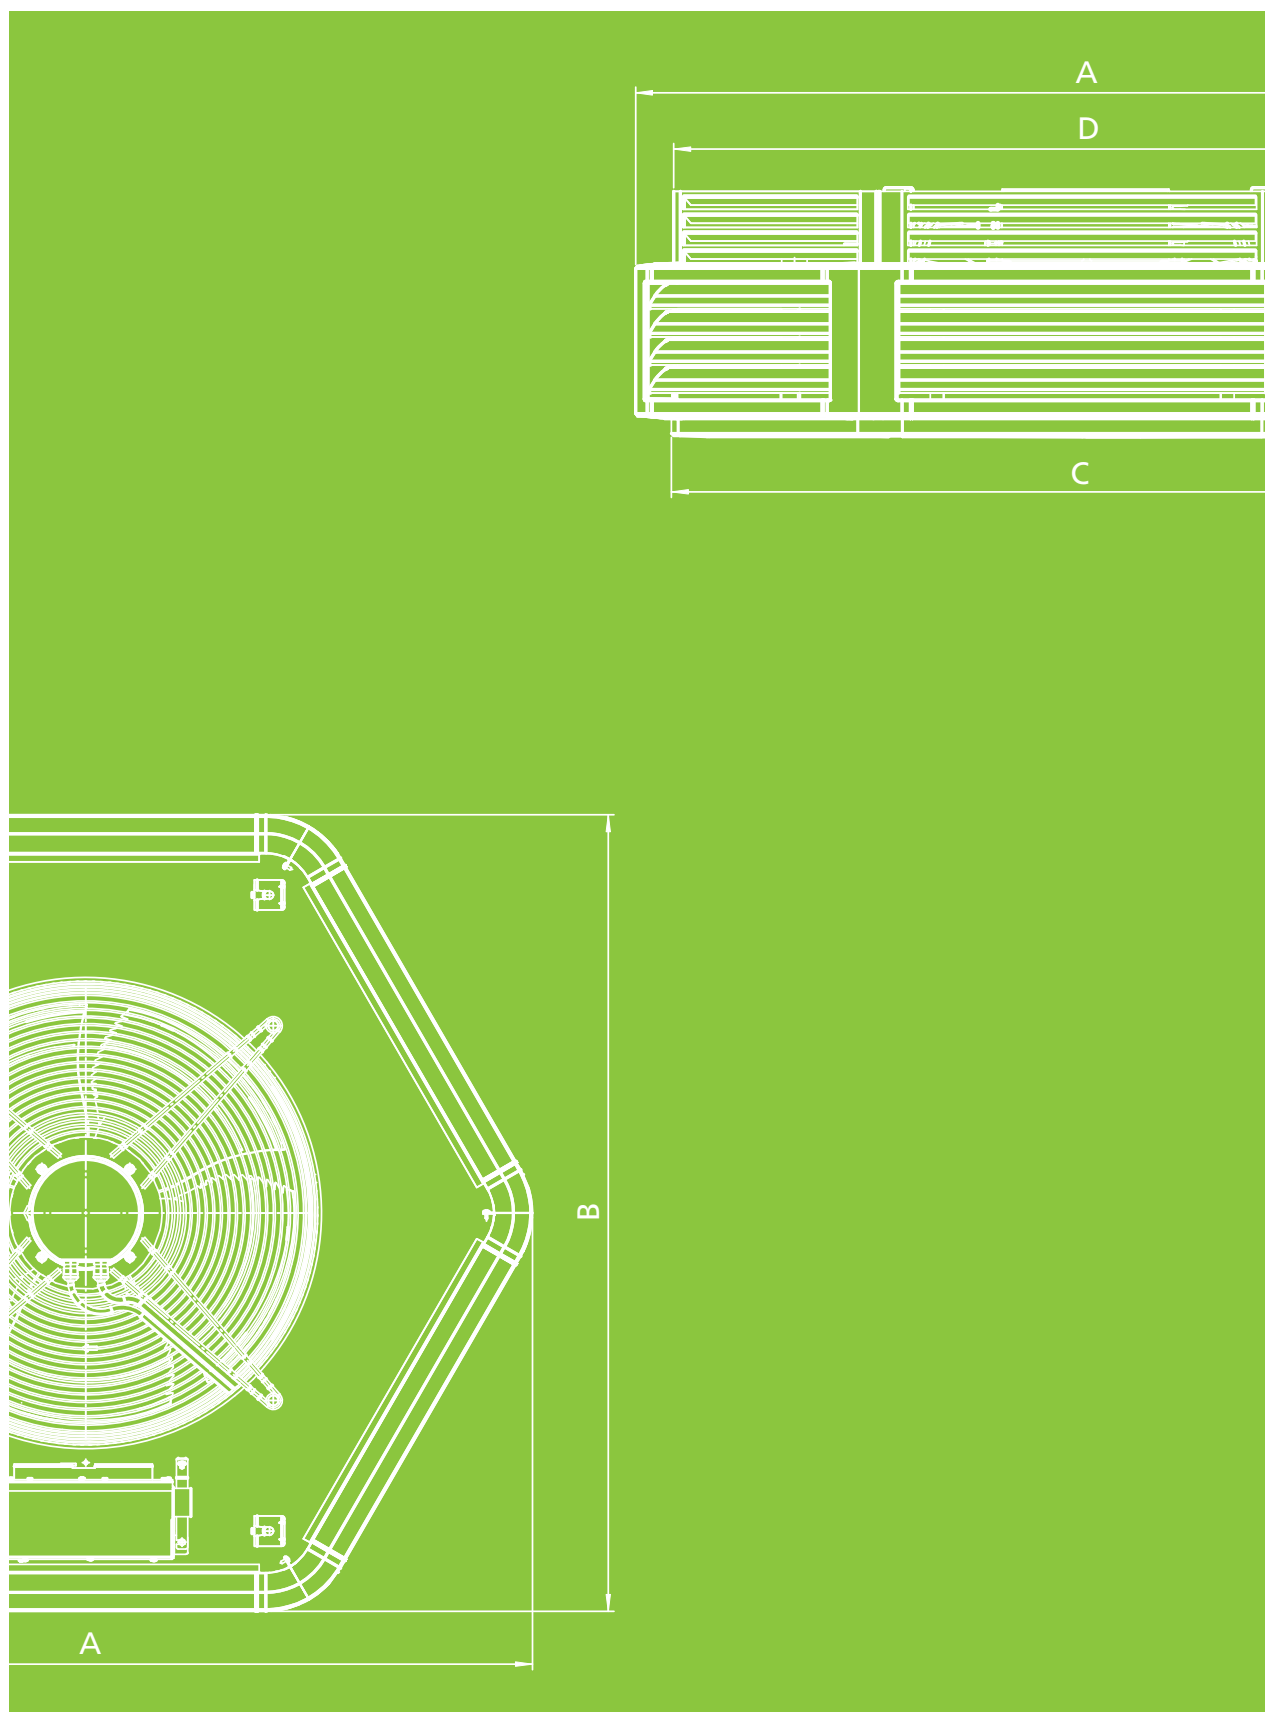

## General


### EU Directive 2009/125/EU

#### Compliance with the ErP Directive 2015

The European Commission's ErP Directive ("Energy-related Products") evaluates and modifies the requirements of technical products in energy-related applications. According to the Directive (EU) 327/2011 ("LOT 11"), the efficiency requirements have become more stringent for fans with an electric drive output of 125 watts to 500 kilowatts. A number of fans can no longer be marketed since the second stage entered into force on 1st January 2015.

The inlet nozzle used in the unit must be taken into account along with the fan, in terms of energy. The Ultra range of unit heaters is solely fitted with ErP-compliant fans. The conformity of the Ultra range has been laboratory-tested and proved. The measurements can be provided on request.

The Ultra range and the components used with it are produced and tested in line with the applicable state of the art. The requirements of the applicable standards, e.g. Machinery Directive, EN 60335 (Safety of Electrical Equipment) and EMC are all met.

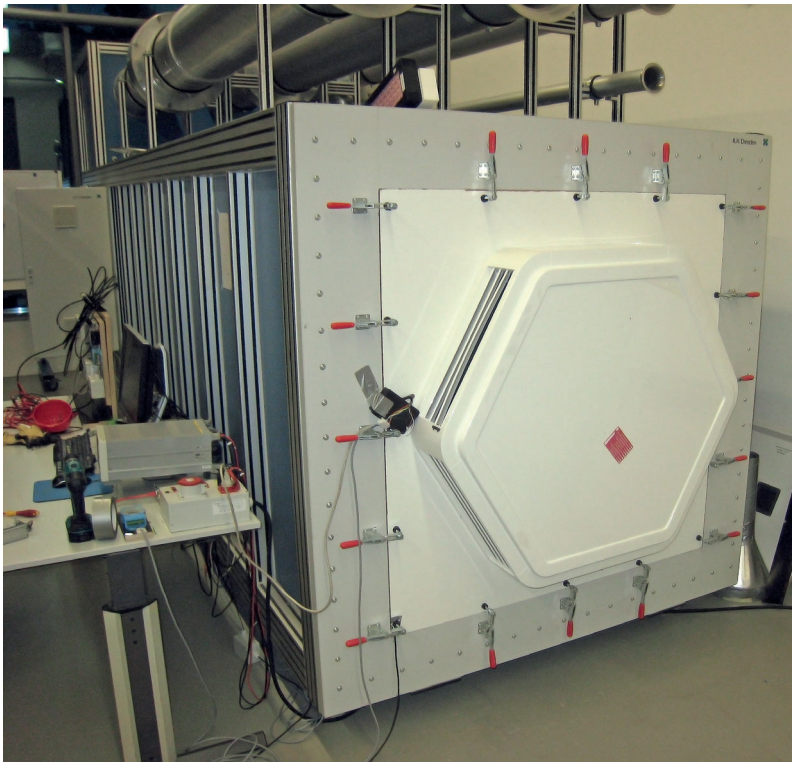

Test chamber for air performance measurements according to DIN EN ISO 5801, Kampmann R & D Centre (FEC)




Ultra

Unit design Heating

Model 73

EC fan, 200-240 V, high speed

Technical drawing (Dimensions in mm)

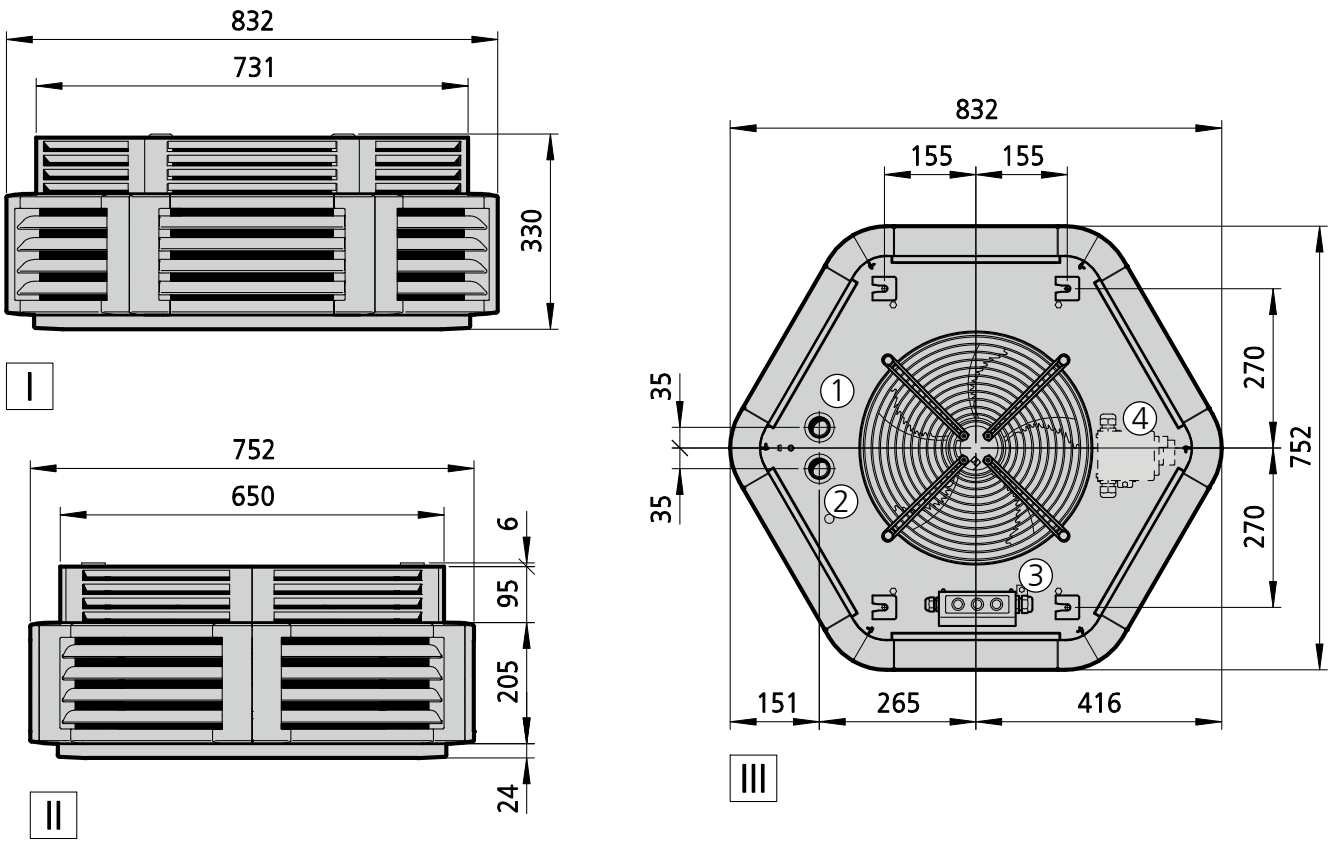

- View
- I Front view
  - II side view
  - III top view

- More information
- ① Flow
  - ② Return
  - ③ Electrical connection for EC model, electromechanical
  - ④ Repair switch (optional)

Specifications

| Type   | Fan version                   | Weight [kg] | Water content [l] | Connection |
|--------|-------------------------------|-------------|-------------------|------------|
| 732058 | EC fan, 200-240 V, high speed | 21          | 1.6               | 1"         |
| 733058 | EC fan, 200-240 V, high speed | 24          | 2.3               | 1"         |

## Performance data

| Type   | Control voltage | Heat output                                    |      | cooling output, total  |      |  |      | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|--------|-----------------|--|------|--|------|--|------|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|        |                 | at LPHW<br>75/65 °C, t <sub>l</sub> =<br>20 °C |      | at CHW 7/12 °C,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity |      | at CHW 16/18,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity |      |          |                   |                   |          |         |                                    |                   |       |                      |
|        | [V]             | [kW]   | [°C] | [kW]   | [°C] | [kW]   | [°C] | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| 732058 | 10              | 12.5   | 45.6 | ---  | ---  | ---  | ---  | 1470     | 940               | 48                | 0.5      | 117     | 44                                 | 60                | 4.5   | 2.5                  |
|        | 8               | 11.2   | 46.7 | ---  | ---  | ---  | ---  | 1270     | 795               | 29                | 0.3      | 83      | 40                                 | 56                | 4.0   | 2.4                  |
|        | 6               | 9.7  | 48.2 | ---  | ---  | ---  | ---  | 1040     | 650               | 17                | 0.2      | 59      | 35                                 | 51                | 3.5   | 2.4                  |
|        | 4               | 8.2  | 50.1 | ---  | ---  | ---  | ---  | 820      | 505               | 10                | 0.1      | 44      | 29                                 | 45                | 3.1   | 2.3                  |
|        | 2               | 6.5  | 52.9 | ---  | ---  | ---  | ---  | 600      | 365               | 7                 | 0.1      | 42      | 23                                 | 39                | 2.6   | 2.2                  |
| 733058 | 10              | 15.7   | 53.0 | ---  | ---  | ---  | ---  | 1440     | 940               | 48                | 0.5      | 120     | 42                                 | 58                | 4.3   | 2.5                  |
|        | 8               | 14.0   | 54.2 | ---  | ---  | ---  | ---  | 1230     | 795               | 29                | 0.3      | 85      | 38                                 | 54                | 3.9   | 2.4                  |
|        | 6               | 12.0   | 55.8 | ---  | ---  | ---  | ---  | 1010     | 650               | 17                | 0.2      | 60      | 33                                 | 49                | 3.5   | 2.4                  |
|        | 4               | 10.0   | 57.7 | ---  | ---  | ---  | ---  | 800      | 505               | 10                | 0.1      | 45      | 27                                 | 43                | 3.1   | 2.3                  |
|        | 2               | 7.8  | 60.3 | ---  | ---  | ---  | ---  | 580      | 365               | 7                 | 0.1      | 43      | 21                                 | 37                | 2.7   | 2.2                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>

<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.

<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).


Ultra

Unit design Heating

Model 84

EC fan, 200-240 V, high speed

Technical drawing (Dimensions in mm)

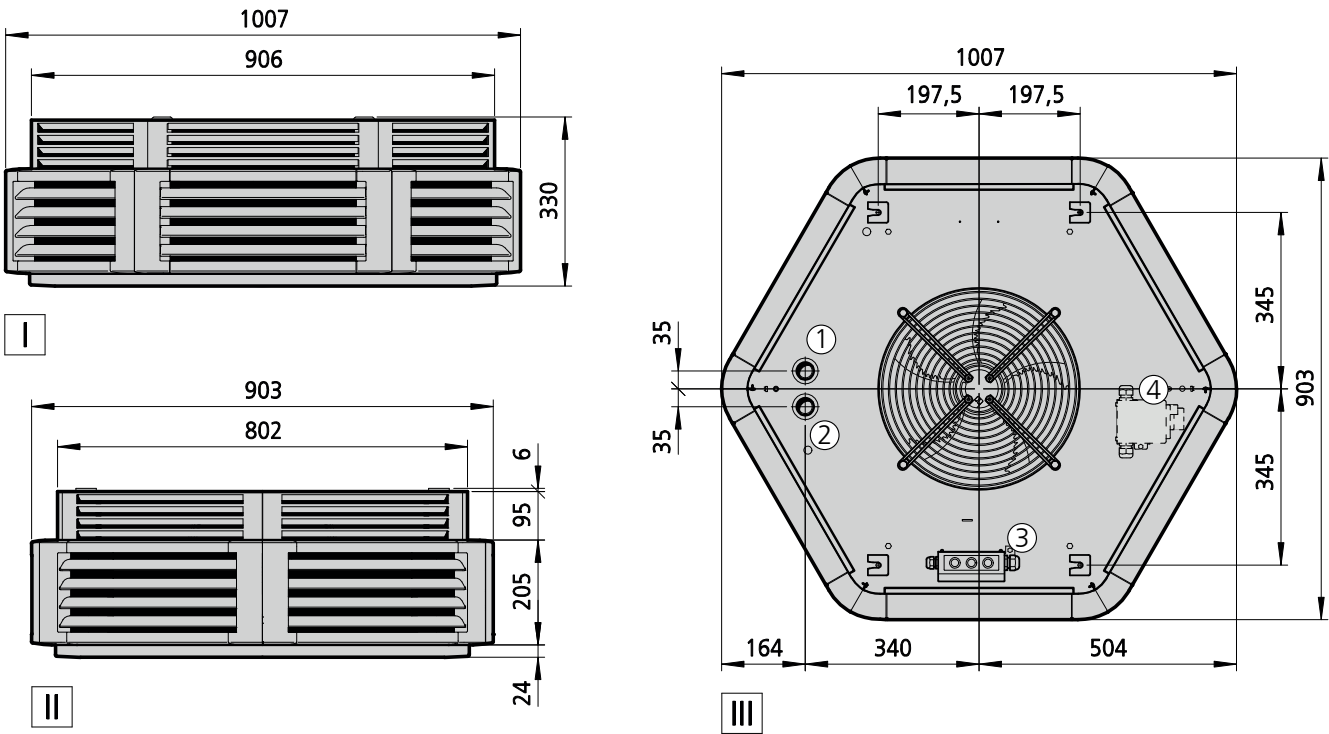

- View

I Front view

II side view

III top view
- More information

① Flow

② Return

③ Electrical connection for EC model, electromechanical

④ Repair switch (optional)

Specifications

| Type   | Fan version                   | Weight [kg] | Water content [l] | Connection |
|--------|-------------------------------|-------------|-------------------|------------|
| 842058 | EC fan, 200-240 V, high speed | 26          | 1.6               | 1"         |
| 843058 | EC fan, 200-240 V, high speed | 29          | 2.3               | 1"         |



## Performance data

| Type          | Control voltage | Heat output                                    |      | cooling output, total  |     |  |     | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|---------------|-----------------|--|------|--|-----|--|-----|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|               |                 | at LPHW<br>75/65 °C, t <sub>l</sub> =<br>20 °C | °C   | at CHW 7/12 °C,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity | °C  | at CHW 16/18,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity | °C  |          |                   |                   |          |         |                                    |                   |       |                      |
|               | [V]             | [kW]   | °C   | [kW]   | °C  | [kW]   | °C  | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| <b>842058</b> | 10              | 15.6   | 45.5 | ---  | --- | ---  | --- | 1850     | 1070              | 70                | 0.7      | 137     | 48                                 | 64                | 4.9   | 2.9                  |
|               | 8               | 14.4   | 46.2 | ---  | --- | ---  | --- | 1660     | 950               | 39                | 0.5      | 85      | 44                                 | 60                | 4.5   | 2.8                  |
|               | 6               | 11.8   | 47.8 | ---  | --- | ---  | --- | 1280     | 730               | 21                | 0.3      | 59      | 37                                 | 53                | 3.5   | 2.6                  |
|               | 4               | 8.8  | 50.5 | ---  | --- | ---  | --- | 870      | 490               | 11                | 0.1      | 46      | 28                                 | 44                | 2.5   | 2.4                  |
|               | 2               | 5.9  | 55.7 | ---  | --- | ---  | --- | 500      | 280               | 7                 | 0.1      | 50      | 19                                 | 35                | 1.6   | 2.2                  |
| <b>843058</b> | 10              | 20.3   | 54.3 | ---  | --- | ---  | --- | 1790     | 1070              | 70                | 0.7      | 141     | 46                                 | 62                | 4.8   | 2.8                  |
|               | 8               | 18.7   | 55.1 | ---  | --- | ---  | --- | 1600     | 950               | 39                | 0.5      | 88      | 42                                 | 58                | 4.3   | 2.7                  |
|               | 6               | 15.1   | 56.9 | ---  | --- | ---  | --- | 1240     | 730               | 21                | 0.3      | 61      | 35                                 | 51                | 3.4   | 2.6                  |
|               | 4               | 11.1   | 59.6 | ---  | --- | ---  | --- | 840      | 490               | 11                | 0.1      | 47      | 26                                 | 42                | 2.4   | 2.4                  |
|               | 2               | 7.1  | 64.2 | ---  | --- | ---  | --- | 490      | 280               | 7                 | 0.1      | 52      | 17                                 | 33                | 1.6   | 2.3                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>

<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.

<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).



## Performance data

| Type          | Control voltage | Heat output                                    |      | cooling output, total  |      |  |      | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|---------------|-----------------|--|------|--|------|--|------|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|               |                 | at LPHW<br>75/65 °C, t <sub>l</sub> =<br>20 °C | °C   | at CHW 7/12 °C,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity | °C   | at CHW 16/18,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity | °C   |          |                   |                   |          |         |                                    |                   |       |                      |
|               | [V]             | [kW]   |      | [kW]   |      | [kW]   |      | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| <b>843158</b> | 10              | 20.3   | 54.2 | 7.5  | 17.2 | 3.7  | 20.6 | 1790     | 1070              | 70                | 0.7      | 141     | 46                                 | 62                | 4.8   | 2.8                  |
|               | 8               | 18.6   | 55.0 | 6.9  | 16.9 | 3.4  | 20.4 | 1600     | 950               | 39                | 0.5      | 88      | 42                                 | 58                | 4.3   | 2.7                  |
|               | 6               | 15.1   | 56.9 | 5.7  | 16.2 | 2.8  | 20.0 | 1240     | 730               | 21                | 0.3      | 61      | 35                                 | 51                | 3.4   | 2.6                  |
|               | 4               | 11.1   | 59.6 | 4.3  | 15.2 | 2.1  | 19.3 | 840      | 490               | 11                | 0.1      | 47      | 26                                 | 42                | 2.4   | 2.4                  |
|               | 2               | 7.1  | 64.2 | 3.0  | 13.3 | 1.4  | 18.3 | 490      | 280               | 7                 | 0.1      | 52      | 17                                 | 33                | 1.6   | 2.3                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>


<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.

<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

# Ultra

Unit design Heating  
Model 85  
EC fan, 200-240 V, high speed

Technical drawing (Dimensions in mm)

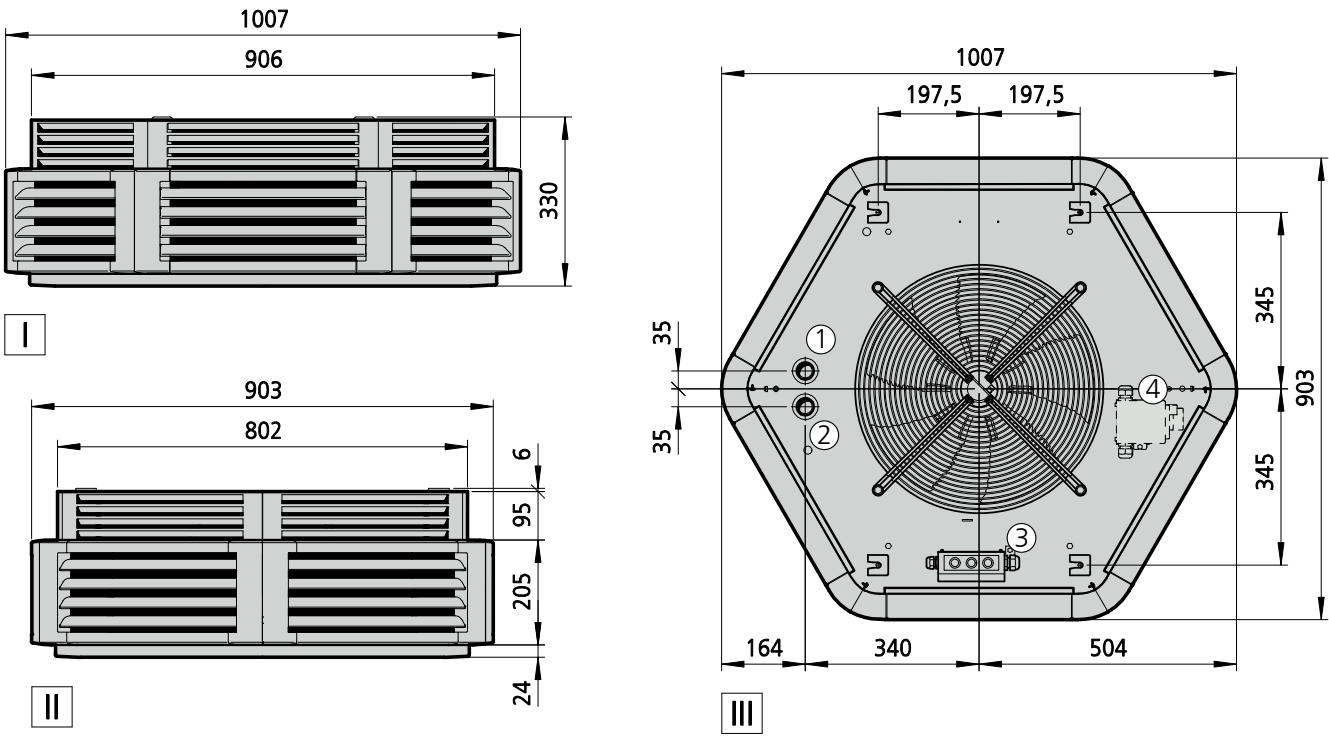

- View**
- I Front view
  - II side view
  - III top view

- More information**
- ① Flow
  - ② Return
  - ③ Electrical connection for EC model, electromechanical
  - ④ Repair switch (optional)

## Specifications

| Type   | Fan version                   | Weight [kg] | Water content [l] | Connection |
|--------|-------------------------------|-------------|-------------------|------------|
| 852058 | EC fan, 200-240 V, high speed | 28          | 2.0               | 1"         |
| 853058 | EC fan, 200-240 V, high speed | 30          | 2.9               | 1"         |
| 854058 | EC fan, 200-240 V, high speed | 33          | 3.8               | 1"         |

**Performance data**

| Type          | Control voltage | Heat output                                    |      | cooling output, total  |     |  |     | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|---------------|-----------------|--|------|--|-----|--|-----|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|               |                 | at LPHW<br>75/65 °C, t <sub>l</sub> =<br>20 °C | °C   | at CHW 7/12 °C,<br>t <sub>l</sub> = 27 °C,<br>48% relative<br>humidity | °C  | at CHW 16/18,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity | °C  |          |                   |                   |          |         |                                    |                   |       |                      |
|               | [V]             | [kW]   | °C   | [kW]   | °C  | [kW]   | °C  | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| <b>852058</b> | 10              | 21.7   | 42.0 | ---  | --- | ---  | --- | 2980     | 1070              | 165               | 1.5      | 200     | 56                                 | 72                | 5.7   | 3.4                  |
|               | 8               | 19.7   | 42.7 | ---  | --- | ---  | --- | 2610     | 950               | 95                | 1.0      | 131     | 53                                 | 69                | 5.3   | 3.3                  |
|               | 6               | 15.9   | 44.4 | ---  | --- | ---  | --- | 1970     | 730               | 46                | 0.6      | 84      | 45                                 | 61                | 4.6   | 3.0                  |
|               | 4               | 11.5   | 47.3 | ---  | --- | ---  | --- | 1270     | 490               | 23                | 0.3      | 65      | 34                                 | 50                | 3.8   | 2.6                  |
|               | 2               | 7.3  | 54.4 | ---  | --- | ---  | --- | 640      | 280               | 12                | 0.2      | 68      | 23                                 | 39                | 3.0   | 2.3                  |
| <b>853058</b> | 10              | 29.1   | 50.4 | ---  | --- | ---  | --- | 2890     | 1070              | 165               | 1.5      | 206     | 54                                 | 70                | 5.6   | 3.4                  |
|               | 8               | 26.3   | 51.3 | ---  | --- | ---  | --- | 2530     | 950               | 95                | 1.0      | 135     | 51                                 | 67                | 5.2   | 3.2                  |
|               | 6               | 21.0   | 53.2 | ---  | --- | ---  | --- | 1910     | 730               | 46                | 0.6      | 87      | 43                                 | 59                | 4.5   | 3.0                  |
|               | 4               | 14.9   | 56.4 | ---  | --- | ---  | --- | 1230     | 490               | 23                | 0.3      | 67      | 32                                 | 48                | 3.7   | 2.6                  |
|               | 2               | 8.9  | 63.4 | ---  | --- | ---  | --- | 620      | 280               | 12                | 0.2      | 70      | 21                                 | 37                | 3.0   | 2.4                  |
| <b>854058</b> | 10              | 33.3   | 57.1 | ---  | --- | ---  | --- | 2710     | 1070              | 165               | 1.5      | 219     | 52                                 | 68                | 5.4   | 3.3                  |
|               | 8               | 29.9   | 58.0 | ---  | --- | ---  | --- | 2370     | 950               | 95                | 1.0      | 144     | 49                                 | 65                | 5.0   | 3.2                  |
|               | 6               | 23.7   | 60.0 | ---  | --- | ---  | --- | 1790     | 730               | 46                | 0.6      | 93      | 41                                 | 57                | 4.4   | 2.9                  |
|               | 4               | 16.5   | 62.9 | ---  | --- | ---  | --- | 1160     | 490               | 23                | 0.3      | 71      | 30                                 | 46                | 3.6   | 2.6                  |
|               | 2               | 9.5  | 68.7 | ---  | --- | ---  | --- | 590      | 280               | 12                | 0.2      | 74      | 19                                 | 35                | 3.0   | 2.4                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>

<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.

<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).




Ultra

Unit design Heating or cooling

Model 85

EC fan, 200-240 V, high speed

Technical drawing (Dimensions in mm)

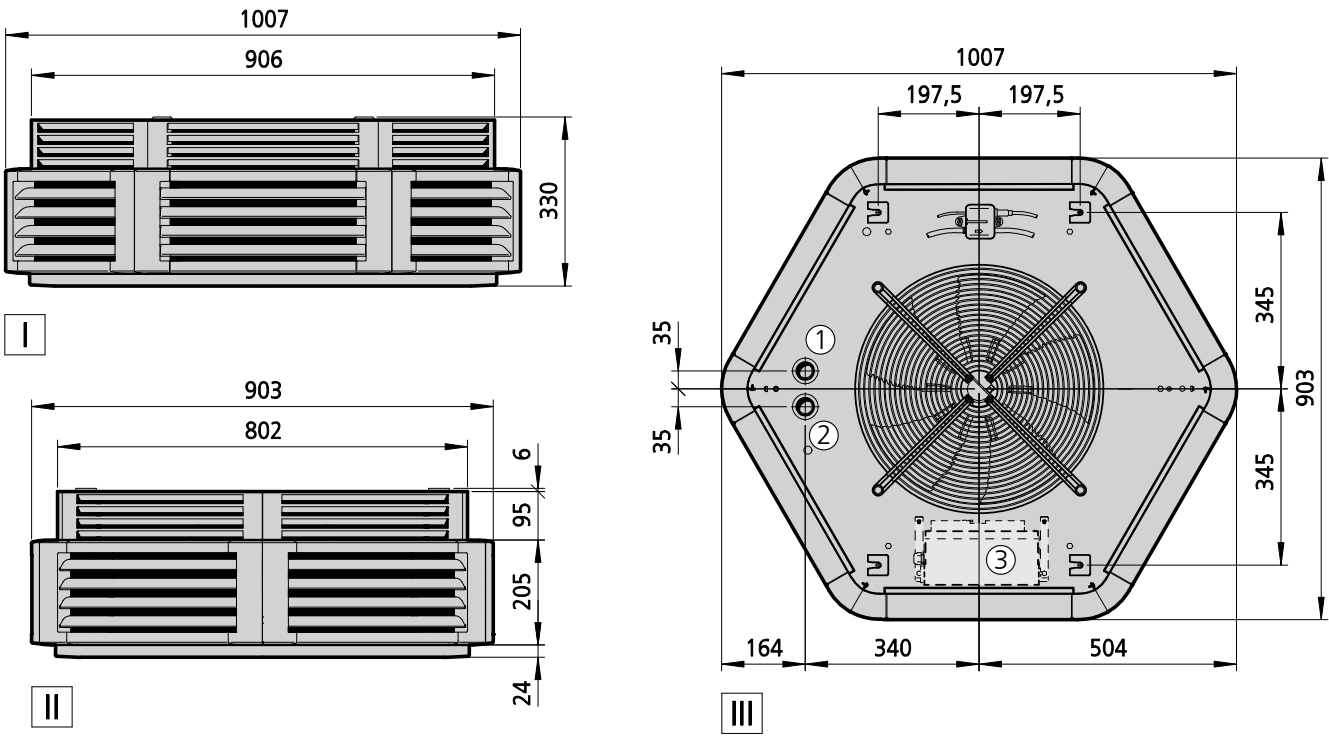

View

- I Front view
- II side view
- III top view

More information

- 1 Flow
- 2 Return
- 3 Electrical connection for EC model with KaControl (optional)

Specifications

| Type   | Fan version                   | Weight [kg] | Water content [l] | Connection |
|--------|-------------------------------|-------------|-------------------|------------|
| 853158 | EC fan, 200-240 V, high speed | 35          | 2.9               | 1"         |
| 854158 | EC fan, 200-240 V, high speed | 36          | 3.8               | 1"         |

## Performance data

| Type          | Control voltage | Heat output                                    |      | cooling output, total  |      |  |      | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|---------------|-----------------|--|------|--|------|--|------|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|               |                 | at LPHW<br>75/65 °C, t <sub>l</sub> =<br>20 °C |      | at CHW 7/12 °C,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity |      | at CHW 16/18,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity |      |          |                   |                   |          |         |                                    |                   |       |                      |
|               | [V]             | [kW]   | [°C] | [kW]   | [°C] | [kW]   | [°C] | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| <b>853158</b> | 10              | 29.1   | 50.4 | 10.1   | 18.5 | 5.1  | 21.5 | 2890     | 1070              | 165               | 1.5      | 206     | 54                                 | 70                | 5.6   | 3.4                  |
|               | 8               | 26.3   | 51.3 | 9.2  | 18.2 | 4.7  | 21.3 | 2530     | 950               | 95                | 1.0      | 135     | 51                                 | 67                | 5.2   | 3.2                  |
|               | 6               | 21.0   | 53.2 | 7.5  | 17.5 | 3.8  | 20.8 | 1910     | 730               | 46                | 0.6      | 87      | 43                                 | 59                | 4.5   | 3.0                  |
|               | 4               | 14.9   | 56.4 | 5.6  | 16.4 | 2.8  | 20.0 | 1230     | 490               | 23                | 0.3      | 67      | 32                                 | 48                | 3.7   | 2.6                  |
|               | 2               | 8.9  | 63.4 | 3.7  | 13.7 | 1.7  | 18.5 | 620      | 280               | 12                | 0.2      | 70      | 21                                 | 37                | 3.0   | 2.4                  |
| <b>854158</b> | 10              | 31.4   | 58.7 | 12.0   | 15.6 | 5.7  | 19.8 | 2450     | 1070              | 165               | 1.5      | 243     | 54                                 | 70                | 4.8   | 3.2                  |
|               | 8               | 28.2   | 59.8 | 10.8   | 15.3 | 5.2  | 19.5 | 2130     | 950               | 95                | 1.0      | 160     | 51                                 | 67                | 4.5   | 3.0                  |
|               | 6               | 22.3   | 61.8 | 8.8  | 14.5 | 4.2  | 19.0 | 1610     | 730               | 46                | 0.6      | 103     | 43                                 | 59                | 3.9   | 2.8                  |
|               | 4               | 15.6   | 64.9 | 6.5  | 13.2 | 3.0  | 18.3 | 1050     | 490               | 23                | 0.3      | 79      | 32                                 | 48                | 3.3   | 2.6                  |
|               | 2               | 9.1  | 71.4 | 4.2  | 10.3 | 1.7  | 17.1 | 530      | 280               | 12                | 0.2      | 81      | 21                                 | 37                | 2.7   | 2.3                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>

<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.

<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).


Ultra  
Unit design Heating  
Model 96  
EC fan, 200-240 V, high speed

## Unit design Heating

## Model 96

EC fan, 200-240 V, high speed

### Technical drawing (Dimensions in mm)

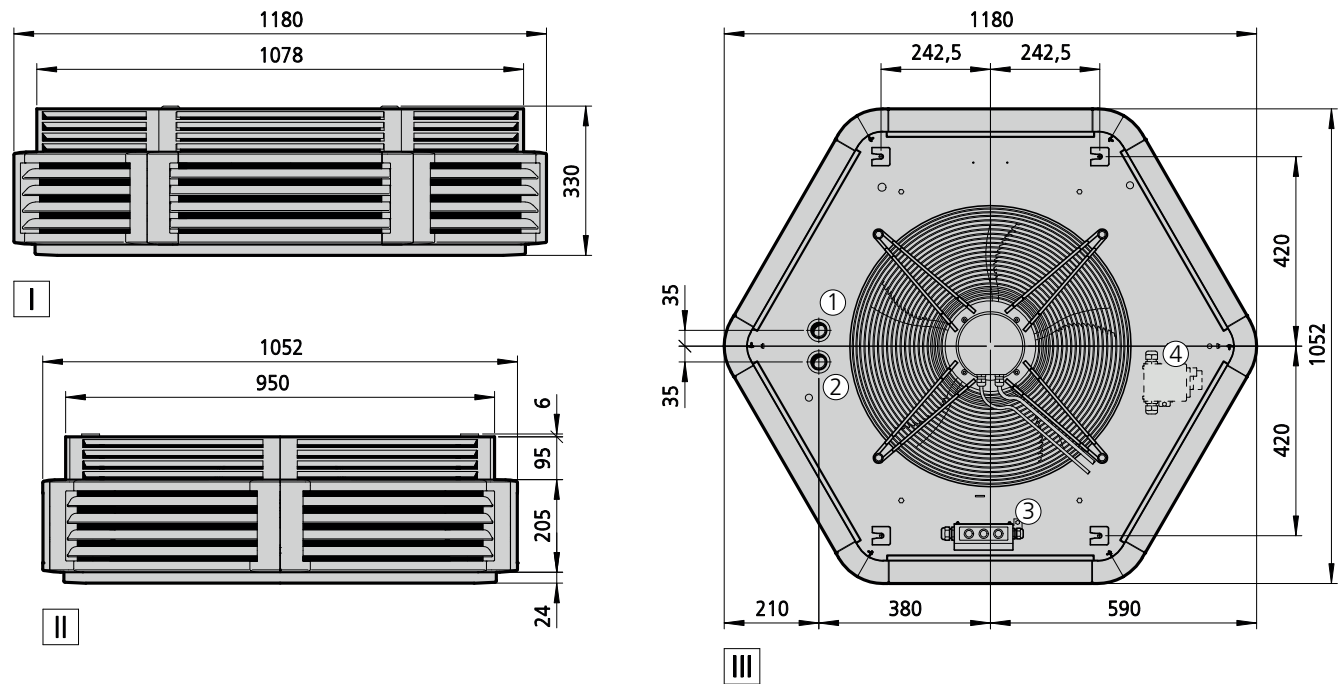

## View

- ☐ I Front view
- ☐ II side view
- ☐ III top view

### More information

- ① Flow
- ② Return
- ③ Electrical connection for EC model, electromechanical
- ④ Repair switch (optional)

## Specifications

| Type   | Fan version                      | Weight<br>[kg] | Water content<br>[l] | Connection |
|--------|----------------------------------|----------------|----------------------|------------|
| 962058 | EC fan, 200-240 V, high speed    | 40             | 2.2                  | 1"         |
| 963058 | EC fan, 200-240 V, high speed    | 43             | 3.3                  | 1"         |
| 964058 | EC fan, 200-240 V, high speed    | 45             | 4.4                  | 1"         |
| 962056 | EC fan, 200-240 V, reduced speed | 40             | 2.2                  | 1"         |
| 963056 | EC fan, 200-240 V, reduced speed | 43             | 3.3                  | 1"         |
| 964056 | EC fan, 200-240 V, reduced speed | 45             | 4.4                  | 1"         |

**Performance data**

| Type          | Control voltage | Heat output                                    |      | cooling output, total  |      |  |      | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|---------------|-----------------|--|------|--|------|--|------|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|               |                 | at LPHW<br>75/65 °C, t <sub>a</sub> =<br>20 °C |      | at CHW 7/12 °C,<br>t <sub>a</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity |      | at CHW 16/18,<br>t <sub>a</sub> = 27 °C,<br>48% relative<br>humidity |      |          |                   |                   |          |         |                                    |                   |       |                      |
|               | [V]             | [kW]   | [°C] | [kW]   | [°C] | [kW]   | [°C] | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| <b>962056</b> | 10              | 27.2   | 40.8 | ---  | ---  | ---  | ---  | 3940     | 695               | 171               | 0.8      | 156     | 52                                 | 68                | 6.0   | 4.4                  |
|               | 8               | 22.5   | 42.2 | ---  | ---  | ---  | ---  | 3060     | 545               | 85                | 0.4      | 100     | 47                                 | 63                | 5.2   | 4.0                  |
|               | 6               | 18.1   | 44.2 | ---  | ---  | ---  | ---  | 2250     | 395               | 36                | 0.2      | 58      | 40                                 | 56                | 4.5   | 3.6                  |
|               | 4               | 12.8   | 49.0 | ---  | ---  | ---  | ---  | 1330     | 250               | 16                | 0.1      | 43      | 29                                 | 45                | 3.7   | 3.2                  |
|               | 2               | 8.2  | 64.0 | ---  | ---  | ---  | ---  | 560      | 100               | 8                 | 0.1      | 51      | 15                                 | 31                | 3.0   | 2.8                  |
| <b>962058</b> | 10              | 35.5   | 39.0 | ---  | ---  | ---  | ---  | 5640     | 990               | 470               | 2.1      | 300     | 64                                 | 80                | 7.5   | 5.1                  |
|               | 8               | 29.9   | 40.1 | ---  | ---  | ---  | ---  | 4470     | 790               | 237               | 1.1      | 191     | 58                                 | 74                | 6.5   | 4.6                  |
|               | 6               | 23.8   | 41.8 | ---  | ---  | ---  | ---  | 3300     | 580               | 98                | 0.5      | 107     | 50                                 | 66                | 5.4   | 4.1                  |
|               | 4               | 17.2   | 44.8 | ---  | ---  | ---  | ---  | 2090     | 370               | 31                | 0.2      | 53      | 39                                 | 55                | 4.3   | 3.5                  |
|               | 2               | 10.2   | 54.6 | ---  | ---  | ---  | ---  | 890      | 160               | 10                | 0.1      | 41      | 25                                 | 41                | 3.3   | 3.0                  |
| <b>963056</b> | 10              | 36.1   | 49.3 | ---  | ---  | ---  | ---  | 3710     | 695               | 171               | 0.8      | 166     | 50                                 | 66                | 5.8   | 4.3                  |
|               | 8               | 29.6   | 50.9 | ---  | ---  | ---  | ---  | 2880     | 545               | 85                | 0.4      | 106     | 45                                 | 61                | 5.1   | 3.9                  |
|               | 6               | 23.3   | 53.1 | ---  | ---  | ---  | ---  | 2120     | 395               | 36                | 0.2      | 61      | 38                                 | 54                | 4.4   | 3.5                  |
|               | 4               | 16.0   | 58.0 | ---  | ---  | ---  | ---  | 1270     | 250               | 16                | 0.1      | 45      | 27                                 | 43                | 3.6   | 3.2                  |
|               | 2               | 9.4  | 73.4 | ---  | ---  | ---  | ---  | 530      | 100               | 8                 | 0.1      | 54      | 13                                 | 29                | 2.9   | 2.8                  |
| <b>963058</b> | 10              | 47.8   | 47.1 | ---  | ---  | ---  | ---  | 5320     | 990               | 470               | 2.1      | 318     | 62                                 | 78                | 7.2   | 5.0                  |
|               | 8               | 39.9   | 48.5 | ---  | ---  | ---  | ---  | 4220     | 790               | 237               | 1.1      | 202     | 56                                 | 72                | 6.2   | 4.5                  |
|               | 6               | 31.4   | 50.4 | ---  | ---  | ---  | ---  | 3110     | 580               | 98                | 0.5      | 113     | 48                                 | 64                | 5.2   | 4.0                  |
|               | 4               | 22.1   | 53.7 | ---  | ---  | ---  | ---  | 1970     | 370               | 31                | 0.2      | 57      | 37                                 | 53                | 4.2   | 3.5                  |
|               | 2               | 12.2   | 63.8 | ---  | ---  | ---  | ---  | 840      | 160               | 10                | 0.1      | 43      | 23                                 | 39                | 3.2   | 3.0                  |
| <b>964056</b> | 10              | 40.1   | 56.5 | ---  | ---  | ---  | ---  | 3310     | 695               | 171               | 0.8      | 186     | 48                                 | 64                | 5.4   | 4.1                  |
|               | 8               | 32.7   | 58.1 | ---  | ---  | ---  | ---  | 2590     | 545               | 85                | 0.4      | 118     | 43                                 | 59                | 4.8   | 3.8                  |
|               | 6               | 25.3   | 60.2 | ---  | ---  | ---  | ---  | 1900     | 395               | 36                | 0.2      | 68      | 36                                 | 52                | 4.2   | 3.4                  |
|               | 4               | 17.1   | 64.4 | ---  | ---  | ---  | ---  | 1160     | 250               | 16                | 0.1      | 50      | 25                                 | 41                | 3.6   | 3.1                  |
|               | 2               | 9.2  | 77.8 | ---  | ---  | ---  | ---  | 480      | 100               | 8                 | 0.1      | 60      | 11                                 | 27                | 3.0   | 2.8                  |
| <b>964058</b> | 10              | 53.7   | 54.1 | ---  | ---  | ---  | ---  | 4750     | 990               | 470               | 2.1      | 356     | 60                                 | 76                | 6.7   | 4.7                  |
|               | 8               | 44.6   | 55.6 | ---  | ---  | ---  | ---  | 3780     | 790               | 237               | 1.1      | 226     | 54                                 | 70                | 5.8   | 4.3                  |
|               | 6               | 34.7   | 57.6 | ---  | ---  | ---  | ---  | 2780     | 580               | 98                | 0.5      | 127     | 46                                 | 62                | 4.9   | 3.8                  |
|               | 4               | 23.9   | 60.8 | ---  | ---  | ---  | ---  | 1770     | 370               | 31                | 0.2      | 63      | 35                                 | 51                | 4.1   | 3.4                  |
|               | 2               | 12.4   | 69.6 | ---  | ---  | ---  | ---  | 750      | 160               | 10                | 0.1      | 48      | 21                                 | 37                | 3.2   | 2.9                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>


<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.

<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

# Ultra

Unit design Heating or cooling  
Model 96  
EC fan, 200-240 V, high speed

Technical drawing (Dimensions in mm)

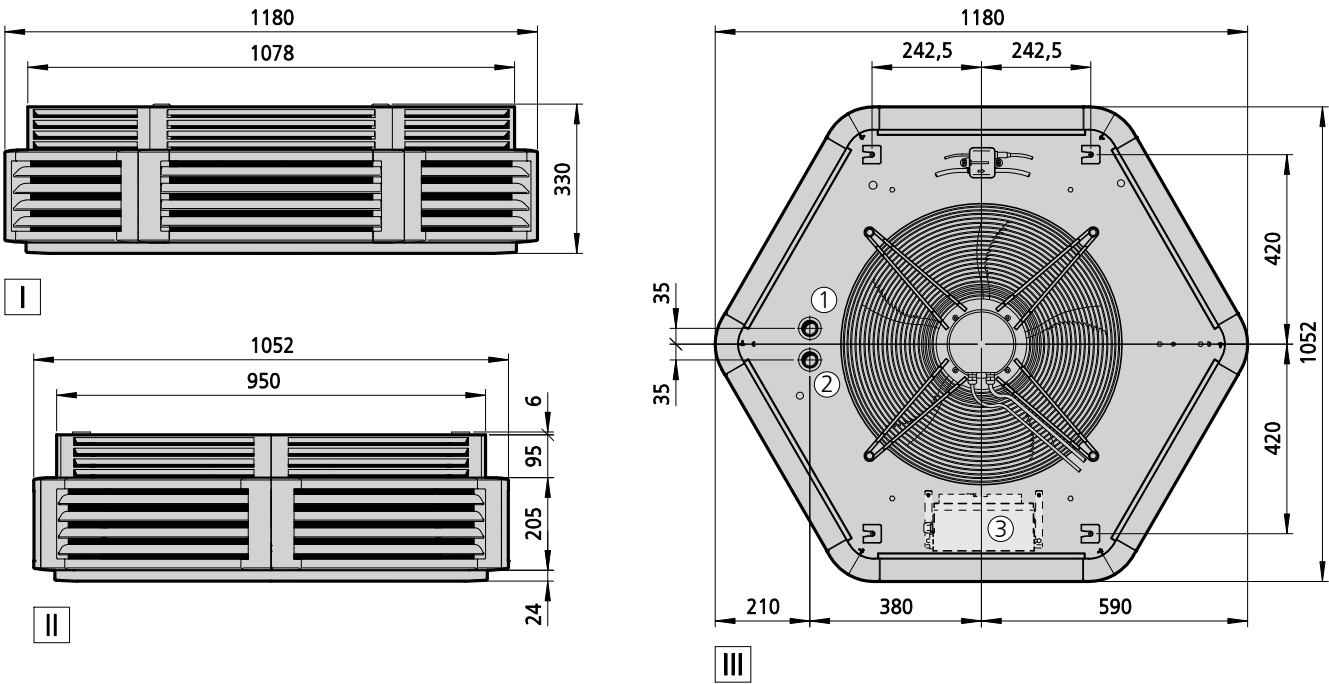

- View**
- I Front view
  - II side view
  - III top view

- More information**
- ① Flow
  - ② Return
  - ③ Electrical connection for EC model with KaControl (optional)

## Specifications

| Type   | Fan version                      | Weight [kg] | Water content [l] | Connection |
|--------|----------------------------------|-------------|-------------------|------------|
| 963158 | EC fan, 200-240 V, high speed    | 48          | 3.3               | 1"         |
| 964158 | EC fan, 200-240 V, high speed    | 50          | 4.4               | 1"         |
| 963156 | EC fan, 200-240 V, reduced speed | 48          | 3.3               | 1"         |
| 964156 | EC fan, 200-240 V, reduced speed | 50          | 4.4               | 1"         |



## Performance data

| Type   | Control voltage | Heat output                                    |      | cooling output, total  |      |  |      | Air flow | Nominal fan speed | Power consumption | Amperage | SFP     | Sound pressure level <sup>2)</sup> | Sound power level | Throw | Max. mounting height |
|--------|-----------------|--|------|--|------|--|------|----------|-------------------|-------------------|----------|---------|------------------------------------|-------------------|-------|----------------------|
|        |                 | at LPHW<br>75/65 °C, t <sub>l</sub> =<br>20 °C |      | at CHW 7/12 °C,<br>t <sub>l</sub> <sup>1)</sup> = 27 °C,<br>48% relative<br>humidity |      | at CHW 16/18,<br>t <sub>l</sub> = 27 °C,<br>48% relative<br>humidity |      |          |                   |                   |          |         |                                    |                   |       |                      |
|        | [V]             | [kW]   | [°C] | [kW]   | [°C] | [kW]   | [°C] | [m³/h]   | [1/min]           | [W]               | [A]      | [Ws/m³] | [dB(A)]                            | [dB(A)]           | [m]   | [m]                  |
| 963156 | 10              | 36.1   | 49.3 | ---  | ---  | 6.4  | 21.6 | 3710     | 695               | 171               | 0.8      | 166     | 50                                 | 66                | 5.8   | 3.7                  |
|        | 8               | 29.6   | 50.9 | 10.3   | 18.2 | 5.4  | 21.2 | 2880     | 545               | 85                | 0.4      | 106     | 45                                 | 61                | 5.1   | 3.4                  |
|        | 6               | 23.3   | 53.1 | 8.4  | 17.5 | 4.3  | 20.7 | 2120     | 395               | 36                | 0.2      | 61      | 38                                 | 54                | 4.4   | 3.2                  |
|        | 4               | 16.0   | 58.0 | 6.3  | 15.7 | 3.0  | 19.7 | 1270     | 250               | 16                | 0.1      | 45      | 27                                 | 43                | 3.6   | 3.0                  |
|        | 2               | 9.4  | 73.4 | 4.3  | 10.1 | 1.8  | 16.6 | 530      | 100               | 8                 | 0.1      | 54      | 13                                 | 29                | 2.9   | 2.7                  |
| 963158 | 10              | 47.8   | 47.1 | ---  | ---  | 8.2  | 22.2 | 5320     | 990               | 470               | 2.1      | 318     | 62                                 | 78                | 7.2   | 4.1                  |
|        | 8               | 39.9   | 48.5 | ---  | ---  | 7.0  | 21.8 | 4220     | 790               | 237               | 1.1      | 202     | 56                                 | 72                | 6.2   | 3.8                  |
|        | 6               | 31.4   | 50.4 | ---  | ---  | 5.7  | 21.4 | 3110     | 580               | 98                | 0.5      | 113     | 48                                 | 64                | 5.2   | 3.5                  |
|        | 4               | 22.1   | 53.7 | 8.1  | 17.2 | 4.1  | 20.6 | 1970     | 370               | 31                | 0.2      | 57      | 37                                 | 53                | 4.2   | 3.2                  |
|        | 2               | 12.2   | 63.8 | 5.1  | 13.6 | 2.3  | 18.5 | 840      | 160               | 10                | 0.1      | 43      | 23                                 | 39                | 3.2   | 2.8                  |
| 964156 | 10              | 36.8   | 58.5 | 13.9   | 15.7 | 6.7  | 19.8 | 2880     | 695               | 171               | 0.8      | 214     | 50                                 | 66                | 4.7   | 3.4                  |
|        | 8               | 30.2   | 60.1 | 11.7   | 15.1 | 5.6  | 19.4 | 2270     | 545               | 85                | 0.4      | 135     | 45                                 | 61                | 4.2   | 3.3                  |
|        | 6               | 23.2   | 62.4 | 9.4  | 14.1 | 4.3  | 18.8 | 1650     | 395               | 36                | 0.2      | 79      | 38                                 | 54                | 3.7   | 3.1                  |
|        | 4               | 15.9   | 66.4 | 7.0  | 12.4 | 3.0  | 18.0 | 1030     | 250               | 16                | 0.1      | 56      | 27                                 | 43                | 3.2   | 2.9                  |
|        | 2               | 8.4  | 79.9 | 4.4  | 6.4  | 1.6  | 15.3 | 420      | 100               | 8                 | 0.1      | 68      | 13                                 | 29                | 2.7   | 2.7                  |
| 964158 | 10              | 49.3   | 56.0 | ---  | ---  | 8.7  | 20.4 | 4130     | 990               | 470               | 2.1      | 410     | 62                                 | 78                | 5.7   | 3.8                  |
|        | 8               | 41.2   | 57.5 | ---  | ---  | 7.5  | 20.0 | 3310     | 790               | 237               | 1.1      | 258     | 56                                 | 72                | 5.1   | 3.6                  |
|        | 6               | 31.8   | 59.7 | 12.3   | 15.3 | 5.9  | 19.5 | 2420     | 580               | 98                | 0.5      | 146     | 48                                 | 64                | 4.3   | 3.3                  |
|        | 4               | 22.0   | 62.9 | 9.0  | 13.9 | 4.1  | 18.7 | 1550     | 370               | 31                | 0.2      | 72      | 37                                 | 53                | 3.6   | 3.0                  |
|        | 2               | 11.4   | 71.7 | 5.4  | 10.0 | 2.2  | 16.9 | 670      | 160               | 10                | 0.1      | 54      | 23                                 | 39                | 2.9   | 2.8                  |

Use our calculation tools on our website to easily calculate heat outputs and other technical data with just a few clicks!

► <https://www.kampmanngroup.com/hvac/products/unit-heaters/ultra#Calculate-performance-data>

<sup>1)</sup> Unit designs (model size 96 only) with the non-existent cooling capacities in the control voltages 6, 8 or 10 V are only suitable for dry cooling.


<sup>2)</sup> The sound pressure levels were calculated with an assumed room insulation of 16 dB(A). This corresponds to a distance of 5 m, a room volume of 3000 m³ and a reverberation time of 2.0 s (in accordance with VDI 2081).

## 03 ► Design information


---



## Types of installation – recirculating air installation

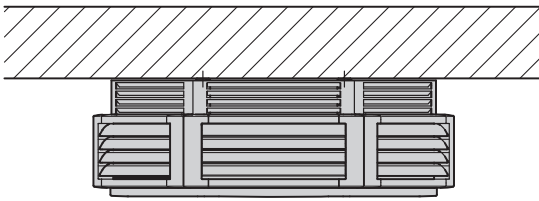

Recirculating air unit with a solid ceiling

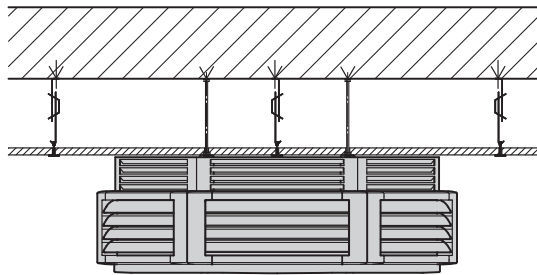


Recirculating air unit with a raised ceiling

### Suggested installations – Recirculating air

#### Example 1: Ultra with recirculating air filter attachment with an open ceiling


Ultra fitted below an open ceiling; recirculating air filter attachment arranged above the unit, air intake through the open ceiling.



- ① Ultra
- ② recirculating air filter attachment type 6\*050

#### Example 2: Ultra with recirculating air components for installation in a suspended ceiling

Ultra installed below a suspended ceiling; intake air filtered through filter insert in 90° air intake bend; air intake through square recirculating air intake grille, fits acoustic ceiling grids measuring 625 x 625 mm with visible installation rail

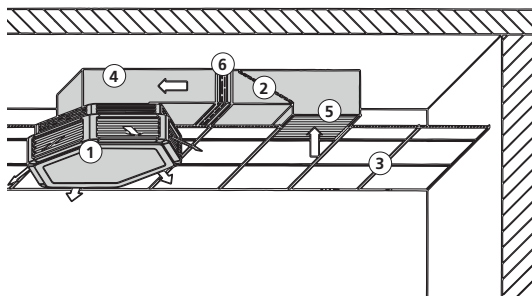

- ① Ultra
- ② filter insert with ISO Coarse 45% filter, type 60126
- ③ acoustic ceiling grid, 625 x 625 mm<sup>1)</sup>, with visible installation rail
- ④ 90° reducing bend, type 60104
- ⑤ 90° air intake bend with intake grille type 60105
- ⑥ flexible connection, type 6\*034

\* Insert figure for unit size.

<sup>1)</sup> Model for ceiling grid 600 x 600 mm on request.

## Information on planning and design

The selection and configuration of the Kampmann Ultra depends on more than just the heat load calculated. The required air circulation, structural and acoustic conditions and unit-specific properties need to be taken into consideration, among other things.

### Unit design

The units required are determined using the usual standards and guidelines. Operating a dynamic air handling system with Ultra units is ideal for non-steady state operation. We would recommend allowing a margin to ensure that the heating system is adapted to the specific conditions of use.

Calculating the number, size and design stage of Ultra units is based on the:

- ▶ calculated heat output
- ▶ max. mounting height
- ▶ required air circulation
- ▶ sound levels to be adhered to
- ▶ structural conditions, such as occupied zones, installation points, furniture

Designing the Ultra with EC fan with a control voltage of 6 V has proved itself in practice. This leaves reserves to heat a room up after the units have been switched off for some time and also ensures maximum energy efficiency.

### Suspended ceiling installation with acoustic ceilings

Detailed description with examples on [page 29](#).

### Air circulation

Designing the Ultra based on the air circulation has proved to be very practical to obtain a simplified and reliable unit selection and uniform air distribution. The right gaps between unit heaters can be obtained taking into consideration the maximum mounting height without the need for additional calculations.

$$LU \quad [1/h] = \frac{V_{L\text{eff}} \cdot n}{V}$$

$LU \quad [1/h]$  = air circulation at the design stage

$V_{L\text{eff}} \quad [m^3/h]$  = effective air volume of the unit at the design stage

$V \quad [m^3]$  = room volume

$n \quad [-]$  = number of Ultra units

| Air circulation LU [1/h] |           |
|--------------------------|-----------|
| minimum                  | 1.5       |
| better                   | 2.0       |
| good                     | 2.5 - 3.0 |
| very good                | 3.5 - 4.0 |

### Outlet air temperatures

Air outlet temperatures can be calculated using the following formula:

- ▶ if the use of additional components results in a reduced air volume and thus a lower heat output
- ▶ if a temperature difference  $\Delta t$  between the mean water temperature and the air intake temperature has been selected, which is not shown in the performance tables

$$t_{L2} = t_{L1} + \frac{Q_{\text{eff}} \cdot 1000}{V_{L\text{eff}} \cdot C}$$

|                        |   |  |
|------------------------|---|--|
| $t_{L1}$ [°C]          | = | inlet air temperature  |
| $t_{L2}$ [°C]          | = | outlet air temperature   |
| $Q_{\text{eff}}$ [kW]  | = | effective heat output of the Ultra   |
| $V_{L\text{eff}}$ [kW] | = | effective heat output of the Ultra (taking into account add-on components) |
| $C$ [Wh/m³ K]          | = | multiplier for outlet air temperature calculation                          |

| $t_{L1}$ | $C$       | $t_{L1}$ | $C$       |
|----------|-----------|----------|-----------|
| [°C]     | [Wh/m³ K] | [°C]     | [Wh/m³ K] |
| + 20     | 0.34      | ± 0      | 0.36      |
| + 10     | 0.35      | -10      | 0.37      |

Guideline values for the outlet air temperature:

- ▶ min. 30 – 35 °C (only go below at high fan speed)
- ▶ max. 50 – 55 °C

If a leaving air temperature of 35°C cannot be reached due to low flow temperatures, adjust the outlet air slats so that the primary air stream does not point directly at the occupied zones. The occupied zones are therefore heated by secondary vortices.

### Maximum installation height – throw


The maximum installation height and especially the throw are directly dependent on

- ▶ the shape of the room
- ▶ the over-temperature of the air flow
- ▶ the configuration of the room
- ▶ the air volume
- ▶ the discharge louvre position

The throw of the Ultra is defined as the maximum penetration depth of the primary air stream under ideal conditions. All the maximum mounting heights and throws given in the tables only apply to an entering air temperature of up to 20 K above room temperature.

These values should only be viewed as guideline values, in view of the significant dependency of the throw on the room geometry, equipment and up-current caused by higher outlet temperatures.

Higher room depths are indirectly involved and heated in the air exchange by the secondary vortex.

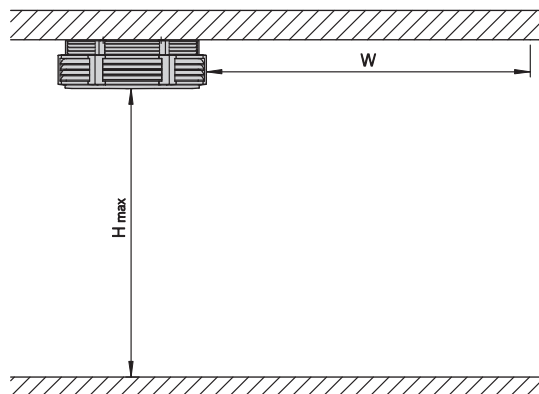

Maximum mounting height ( $H_{\text{max}}$ ) and throw (W)

### Maximum mounting height – throws (for more detailed information, refer to the technical data from page 14 onwards)

| Ultra series                          |       | 73 _ 58 |     |     |     |     | 84 _ 58 |     |     |     |     | 85 _ 58 |     |     |     |     |
|---------------------------------------|-------|---------|-----|-----|-----|-----|---------|-----|-----|-----|-----|---------|-----|-----|-----|-----|
| Voltage                               | [V]   | 10      | 8   | 6   | 4   | 2   | 10      | 8   | 6   | 4   | 2   | 10      | 8   | 6   | 4   | 2   |
| Approx. speed                         | [rpm] | 940     | 795 | 650 | 505 | 365 | 1070    | 950 | 730 | 490 | 280 | 1000    | 890 | 700 | 480 | 260 |
| Max. mounting height $H_{\text{max}}$ | [m]   | 2.5     | 2.4 | 2.4 | 2.3 | 2.3 | 2.9     | 2.7 | 2.4 | 2.4 | 2.3 | 3.4     | 3.2 | 3.0 | 2.7 | 2.4 |
| Throw W                               | [m]   | 4.3     | 3.9 | 3.5 | 3.1 | 2.7 | 4.8     | 4.4 | 3.4 | 2.4 | 1.5 | 5.6     | 5.2 | 4.6 | 3.9 | 3.1 |

| Ultra series                          |       | 96 _ 58 |     |     |     |     | 96 _ 56 |     |     |     |     |
|---------------------------------------|-------|---------|-----|-----|-----|-----|---------|-----|-----|-----|-----|
| Voltage                               | [V]   | 10      | 8   | 6   | 4   | 2   | 10      | 8   | 6   | 4   | 2   |
| Approx. speed                         | [rpm] | 1000    | 800 | 580 | 370 | 170 | 680     | 550 | 410 | 270 | 100 |
| Max. mounting height $H_{\text{max}}$ | [m]   | 4.1     | 3.8 | 3.5 | 3.2 | 2.8 | 3.6     | 3.4 | 3.2 | 3.0 | 2.7 |
| Throw W                               | [m]   | 7.2     | 6.2 | 5.2 | 4.2 | 3.3 | 5.7     | 5.1 | 4.4 | 3.8 | 3.0 |



### Model for cooling mode

This special model is suitable for heating operation with LPHW as well as for cooling operation using CHW. A condensate tray is also integrated in the underside of the unit below the heat exchanger. A collection tank for condensate intake and a float module are positioned in the middle of the tray near the connections and accessible from outside. Only 2 pipes, flow and return, are routed to the Ultra (2-pipe system). A chiller for CHW is required depending on the system. Heating/cooling changeover is triggered centrally (e.g. in the plant room). At this changeover point, the pipework for heating mode is switched to hot water and to cold water for cooling mode. The pipes and fittings must be isolated and laid in accordance with the guidelines for refrigerant lines.

Due to its generously dimensioned basic construction and low basic fan speeds, the cooling model is fundamentally used with air dehumidification.

Nevertheless, specific operating modes and settings need to be taken into account for cooling mode:

- ▶ Never move the louvre slats into the end positions, e.g. to shut off a discharge opening. At high fan speeds, there is otherwise a risk that water droplets could be carried into the other air outlet fields by inadmissibly high air speeds.
- ▶ Only operate unit types 963158 and 964158 at a maximum fan speed of 700 rpm or only with dry cooling.
- ▶ We would recommend the use of valves (e.g. thermoelectric shut-off valve with recirculating mode) to prevent impermissibly severe cooling down of the housing when the fan is at a standstill.

This counteracts the outer parts of the housing experiencing condensate, especially with extreme conditions involving very high levels of humidity.

### Condensate pump

The self-priming condensate pump is fixed to the hose connector for the on-site condensate pressurised line. This ultra-quiet, electromagnetically operating pump is mounted on the top of the unit.

|   |   |
|---|---|
| Max. delivery height:                   | 8 m with max. 4.5 l/h flow rate and a hose length of 10 m                 |
| Max. pump volume:                       | approx. 18 l/h with 0.5 m delivery height and a hose length of 2 m        |
| Supply voltage:                         | 230 V/50 Hz (separate power line needed)                                  |
| Power consumption:                      | 14 W  |
| Condensate pressure line:               | DN 6 mm (hose connection)   |
| Signal contact for condensate overflow: | Normally closed contact (NC), potential-free switching capacity 250 V/5 A |

### Condensate pump limits

The achievable flow volume of the condensate pump used depends on the volume of condensate produced in the Ultra and the length of condensate hose connected. The volume of condensate rises and the possible delivery height of the pump falls with extreme air humidity and/or very low system temperatures. Particularly when operating larger Ultra models (series 96), the volume of humidity produced can exceed the permitted pump volume under extreme conditions.

Therefore set up the alarm contact on the float switch so that dehumidification is stopped (e.g. by the cooling valve closing)

Note the following limits of use of the condensate pump for the max. permitted cooling conditions (CHW 6/10 °C with inlet air temperature 27 °C / 60% rel. humidity):

Ultra series 85: max. permitted delivery height with a 5 m hose length: 3 m

Ultra series 96: max. permitted delivery height with a 5 m hose length: 2 m

Higher-performance pumps are available on request if higher condensate volumes than the maximum permissible volumes need to be discharged.

### Sound power level – Sound pressure level

The large-sized fans with low basic speeds permit extremely low noise levels. Nonetheless, take into account the permissible noise level in your design. Troublesome noises can occur specifically at higher fan speeds. Determine the design fan speed depending on the type of room.

We recommend checking the building approval regulations governing maximum permitted sound levels before commencing the design. Frequently reference is also made in this respect to other standards and regulations, e.g. DIN EN 15251, DIN EN 13779, Workplace Directive, VDI 2082 etc. The base sound level in a room plays a major role in the subjective perception of the source of the sound or the increased sound level. We would therefore recommend first measuring the base sound level to determine the permitted sound pressure level of the Ultra. If the sound pressure level of the unit lies below the room level, then the overall sound level will change only imperceptibly. However, if only very low sound levels are permitted, we would recommend designing the units so that the required output can be achieved at lower fan speeds.

Information on the A-rated total sound levels and sound pressure levels can be found in the technical data tables.

The sound power level needed to determine the differential sound level was calculated using the enveloping surface method as per DIN 45635 employing a comparison method.

The sound pressure level data based on the measurements of the sound power level applies to a low-reflection room with average sound absorption at a distance of 3 m and taken at an angle of 45° from the air outlet without a duct connection. The stated value can differ in practice as the actual sound pressure level in the room is seriously dependent on the acoustic properties of the space, on reflections, duct connections etc.

### Coefficient of air resistance Z

| Attachments  |       | Z                  |                    |
|--|-------|--------------------|--------------------|
| Description  | Type  | Model 5            | Model 6            |
| Recirculating air intake grille, square, 625 x 625 mm                          | 60988 | 3.0 <sup>1)</sup>  | 3.0 <sup>1)</sup>  |
| ISO Coarse 45% recirculating air filter attachment (used with an open ceiling) | 6*050 | 4.0 <sup>1)</sup>  | 4.0 <sup>1)</sup>  |
| Connecting frame, square   | 6*002 | 0.1 <sup>1)</sup>  | 0.1 <sup>1)</sup>  |
| 90° reducing bend, extended  | 6*104 | 1.1                | 1.1                |
| 90° air intake bend, with intake grille  | 60105 | 2.4 <sup>1)</sup>  | 3.4 <sup>1)</sup>  |
| ISO Coarse 45% filter insert   | 60126 | 10.0 <sup>1)</sup> | 14.0 <sup>1)</sup> |
| Rectangular air duct   | 6*030 | 0.1/m              | 0.1/m              |
| Rectangular air duct section, 1250 mm long                                     | 6*130 | 0.1                | 0.1                |
| Flexible connection, rectangular   | 6*034 | 0.1                | 0.1                |

<sup>1)</sup> Coefficients of air resistance based on air speed in a rectangular duct cross-section.

## Heating and air volume correction factors for normal use

|                                |   |      |                               |      |  |      |                               |      |   |      |                               |      |
|--------------------------------|---|------|-------------------------------|------|--|------|-------------------------------|------|---|------|-------------------------------|------|
| Ultra series<br>73-96          |  |      |                               |      |    |      |                               |      |    |      |                               |      |
|                                | Ultra with recirculating air filter element                                       |      |                               |      | Ultra with connecting frame, reducing bend, flex. Connecting section and air intake bend with intake grille, without filter insert |      |                               |      | Ultra with connecting frame, reducing bend, flex. Connecting section and air intake bend with intake grille, with filter insert |      |                               |      |
| Coefficients of air resistance | Total of Z = 4  |      |                               |      | Type series  |      | Total of Z                    |      | Type series   |      | Total of Z                    |      |
|                                |   |      |                               |      | 85_ _  |      | 3.7                           |      | 85_ _   |      | 13.7                          |      |
|                                |   |      |                               |      | 96_ _  |      | 4.7                           |      | 96_ _   |      | 18.7                          |      |
| Ultra                          | Air volume  |      | Heat output                   |      | Air volume   |      | Heat output                   |      | Air volume  |      | Heat output                   |      |
|                                | $f_{L3}$  |      | $f_{Q3}$                      |      | $f_{L3}$   |      | $f_{Q3}$                      |      | $f_{L3}$  |      | $f_{Q3}$                      |      |
|                                | Fan speed stage <sup>2)</sup>   |      | Fan speed stage <sup>2)</sup> |      | Fan speed stage <sup>2)</sup>  |      | Fan speed stage <sup>2)</sup> |      | Fan speed stage <sup>2)</sup>   |      | Fan speed stage <sup>2)</sup> |      |
| Type                           | 10 V  | 6 V  | 10 V                          | 6 V  | 10 V   | 6 V  | 10 V                          | 6 V  | 10 V  | 6 V  | 10 V                          | 6 V  |
| 842058                         | 0.84  | 0.81 | 0.89                          | 0.86 | On request   |      |                               |      |   |      |                               |      |
|                                | 0.84  | 0.81 | 0.89                          | 0.86 |  |      |                               |      |   |      |                               |      |
|                                | 0.84  | -    | 0.89                          | -    |  |      |                               |      |   |      |                               |      |
| 843058                         | 0.84  | 0.82 | 0.89                          | 0.87 |  |      |                               |      |   |      |                               |      |
|                                | 0.84  | 0.82 | 0.89                          | 0.87 |  |      |                               |      |   |      |                               |      |
|                                | 0.84  | -    | 0.89                          | -    |  |      |                               |      |   |      |                               |      |
| 852058                         | 0.80  | 0.77 | 0.86                          | 0.83 | 0.81   | 0.78 | 0.86                          | 0.84 | 0.60  | 0.59 | 0.70                          | 0.69 |
|                                | 0.80  | 0.77 | 0.86                          | 0.83 | 0.81   | 0.78 | 0.86                          | 0.84 | 0.60  | 0.59 | 0.70                          | 0.69 |
|                                | 0.80  | -    | 0.86                          | -    | 0.81   | -    | 0.86                          | -    | 0.60  | -    | 0.70                          | -    |
| 853058                         | 0.80  | 0.78 | 0.86                          | 0.84 | 0.81   | 0.79 | 0.86                          | 0.85 | 0.61  | 0.60 | 0.71                          | 0.70 |
|                                | 0.80  | 0.78 | 0.86                          | 0.84 | 0.81   | 0.79 | 0.86                          | 0.85 | 0.61  | 0.60 | 0.71                          | 0.70 |
|                                | 0.80  | -    | 0.86                          | -    | 0.81   | -    | 0.86                          | -    | 0.61  | -    | 0.71                          | -    |
| 854058                         | 0.81  | 0.79 | 0.86                          | 0.85 | 0.82   | 0.80 | 0.87                          | 0.86 | 0.62  | 0.61 | 0.72                          | 0.71 |
|                                | 0.81  | 0.79 | 0.86                          | 0.85 | 0.82   | 0.80 | 0.87                          | 0.86 | 0.62  | 0.61 | 0.72                          | 0.71 |
|                                | 0.81  | -    | 0.86                          | -    | 0.82   | -    | 0.87                          | -    | 0.62  | -    | 0.72                          | -    |
| 962058                         | 0.73  | 0.71 | 0.80                          | 0.79 | 0.72   | 0.70 | 0.80                          | 0.78 | 0.49  | 0.49 | 0.61                          | 0.61 |
| 962056                         | 0.77  | 0.75 | 0.83                          | 0.82 | 0.76   | 0.74 | 0.83                          | 0.81 | 0.53  | 0.51 | 0.65                          | 0.63 |
|                                | 0.73  | 0.71 | 0.80                          | 0.79 | 0.72   | 0.70 | 0.80                          | 0.78 | 0.49  | 0.49 | 0.61                          | 0.61 |
|                                | 0.73  | -    | 0.80                          | -    | 0.72   | -    | 0.80                          | -    | 0.49  | -    | 0.61                          | -    |
| 963058                         | 0.74  | 0.72 | 0.81                          | 0.80 | 0.73   | 0.71 | 0.80                          | 0.79 | 0.50  | 0.49 | 0.62                          | 0.61 |
| 963056                         | 0.79  | 0.77 | 0.85                          | 0.83 | 0.77   | 0.75 | 0.83                          | 0.82 | 0.54  | 0.52 | 0.65                          | 0.64 |
|                                | 0.74  | 0.72 | 0.81                          | 0.80 | 0.73   | 0.71 | 0.80                          | 0.79 | 0.50  | 0.49 | 0.62                          | 0.61 |
|                                | 0.74  | -    | 0.81                          | -    | 0.73   | -    | 0.80                          | -    | 0.50  | -    | 0.62                          | -    |
| 964058                         | 0.75  | 0.73 | 0.82                          | 0.80 | 0.74   | 0.72 | 0.81                          | 0.80 | 0.51  | 0.50 | 0.63                          | 0.62 |
| 964056                         | 0.80  | 0.78 | 0.86                          | 0.84 | 0.79   | 0.77 | 0.85                          | 0.83 | 0.55  | 0.53 | 0.66                          | 0.65 |
|                                | 0.75  | 0.73 | 0.82                          | 0.80 | 0.74   | 0.72 | 0.81                          | 0.80 | 0.51  | 0.50 | 0.63                          | 0.62 |
|                                | 0.75  | -    | 0.82                          | -    | 0.74   | -    | 0.81                          | -    | 0.51  | -    | 0.63                          | -    |

\* Insert unit size

\*\* Insert unit series

<sup>1)</sup> Coefficients of air resistance based on air speed in a rectangular duct cross-section<sup>2)</sup> Fan speed:

10 V = maximum speed

6 V = medium speed

Correction factors can also be used for Ultra type series 73\_ \_ \_ \_

## Hybrid ECO System

### Air exchange separate from temperature control for comfort and efficiency

Public premises, workshops and retail stores are now not only heated and air conditioned by unit heaters, but can also be supplied with outside air. In this configuration, the extract air is discharged out of the building by means of natural overflow in accordance with the ErP Directive (EU) 1253/2014 without previously recovering the heat contained in it. This results in high energy costs.

Unlike simple ventilators that supply fresh air to a building, ventilation units with heat recovery offer the benefit of recovering heat from the extract air into the supply air in accordance with the ErP Directive (EU) 1253/2014.

If these units have an integral heating and cooling function, their many accessory components and long lengths of ductwork mean that they have to overcome high air-side resistance. What is more, the fans need a lot of energy. The surfaces of the air ducts are significantly larger and poorly insulated than pipes transporting water to generate energy. Too much energy is lost here as well.

Ultra units and the KaCompact ventilation unit, for example, have been designed to fulfil these two tasks, ventilation and temperature regulation, separately, at the same time recovering heat.

The KaCompact feeds filtered outside air into the building and removes exhaust air out of the building, like a conventional centralised ventilation unit. In addition, a rotary heat exchanger transfers heat from the exhaust air to the outside air/supply air and recovers a large proportion of the thermal energy that would otherwise be lost.

In doing so, it obviates the need for the equipment needed with large centralised ventilation units, like chillers, heaters and long lengths of ductwork. The temperature of the air (heating/cooling) is not adjusted in the ventilation unit, but rather outside in the Ultra unit.

One of the major benefits of this separation is the fact that the ventilation unit only needs to be operated with the required exchange of air. The ultra-efficient Ultra units are only operated at times when only heating or cooling is needed.

The energy-saving principle of the separation of functions is known as the Kampmann **"Hybrid ECO system"** and has been used by numerous customers for many years.


The air handling units are extremely important in this system and are designated as "fresh air units" if they meet the following criteria:

- ▶ heat recovery by means of a rotary heat exchanger or counterflow plate heat exchanger
- ▶ energy-saving continuously variable EC fans for precise adjustment of the air volume
- ▶ KaControl AUL control panel for control of air handling units and Ultra units

Possible air handling units for use in conjunction with Ultra units include:

- ▶ Airblock FG
- ▶ Airblock KG
- ▶ KaCompact

## Combination example: two Ultra units with KaCompact ventilation unit

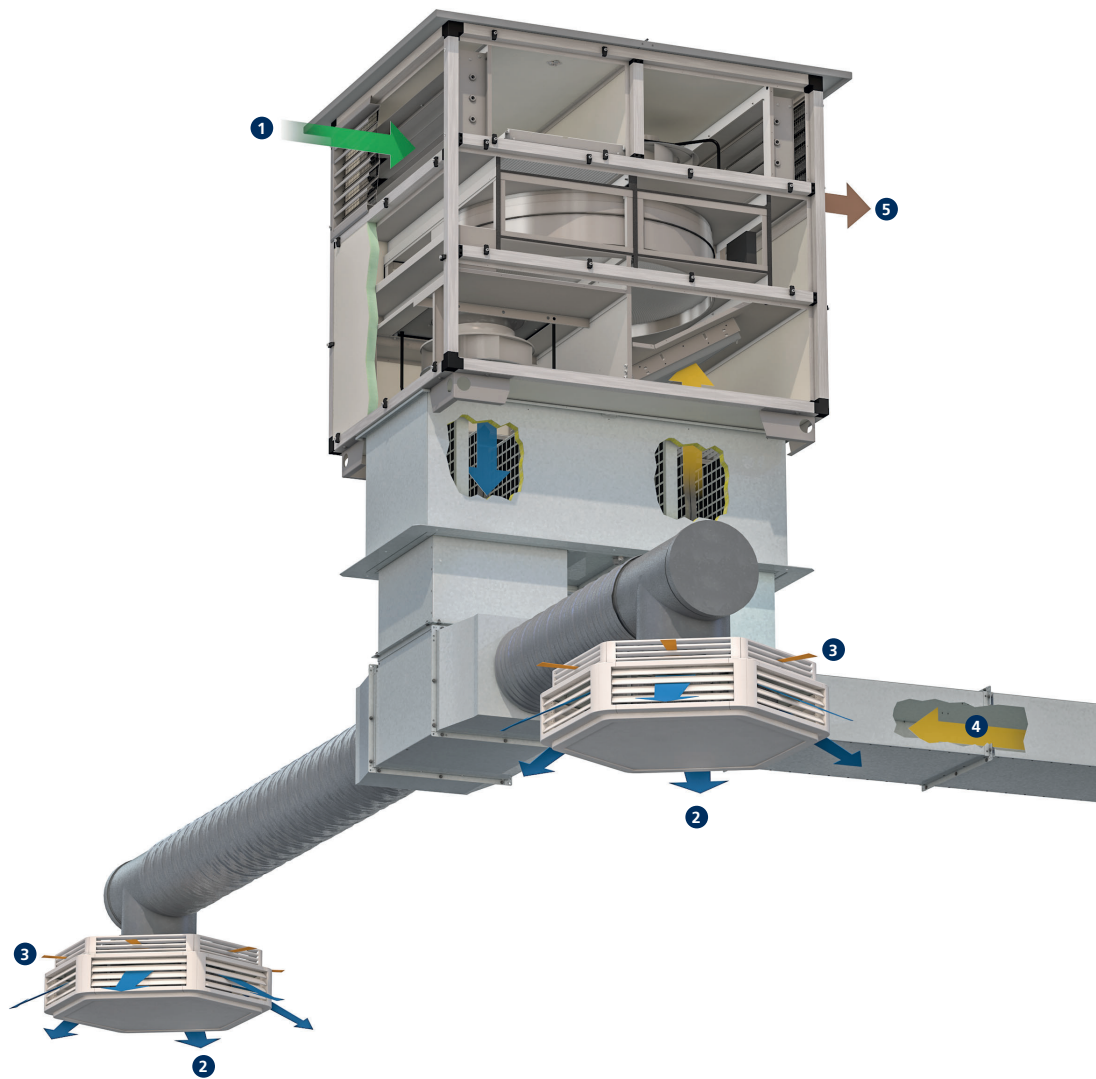

- ① Outside air
- ② Supply air
- ③ Secondary air
- ④ Exhaust air (exhaust air duct optional)
- ⑤ Extract air





## 04 ► Control

---



## Control of Ultra – electromechanical model

### Product features

The EC fans used can be continuously variably controlled by a 0-10 V DC signal.

The “intelligent” motor electronics detects any possible motor fault and automatically switches off the fan. This fault can be externally evaluated. The entire group or individual units are shut down in the event of a motor fault, depending on the control version. The speed can be limited to approx. 50% of the maximum speed by the potentiometer in the junction box. Actuation by Modbus-RTU instead of by a 0-10 V DC signal is possible depending on the type of unit heater.

### Control units

Four different control units are available for operation and control.

#### Speed controller, type 30510

Continuously variable speed controller for use in conjunction with a thermostat for room temperature-dependent two-point control of heating or cooling units in closed rooms. The fan speed is set manually on the speed controller at between 0-100%. The thermostats activate the ventilation units at the pre-set speed depending on the temperature. It is possible to automatically switch between day and night mode using solutions with timer programs (type 30056; type 30076).

#### Room thermostat, type 30155

The EC recirculating air control unit type 30155 enables the operation and temperature control of heating/cooling recirculating air units in 2- or 4-pipe mode. The room temperature can be set on a rotary dial. The temperature is controlled by a fan and valve. In principle, the ventilation unit is switched on and off depending on the temperature and, at the same time, the valve is opened/closed. The fan can be operated manually at 3 stages or continuously variably in automatic mode. The control unit is also equipped with a frost protection function.

#### Clock thermostat, type 30256

The EC recirculating air control unit type 30256 enables the operation and temperature control of heating/cooling recirculating air units for 2- or 4-pipe mode. The room temperature can be set using the functional keys. The temperature is controlled by fan and valve. In principle, the ventilation unit is switched on and off depending on the temperature and, at the same time, the valve is opened/closed. The fan can be controlled at 10 stages, both in automatic mode as well as in manual mode. The control is also equipped with an automatic summer/winter changeover and a frost protection function. The built-in timer program also enables day or week programs to be set.

#### Electronic speed controller, type 30515

The continuously variable electronic compact controller is designed for the operation of up to 10 recirculating air units (2-pipe heating/cooling) with EC fans to heat and cool rooms. The controller has a temperature control, which works with a fan and shut-off valve. The temperature setpoint can be set for day and night mode. A digital timer, including day, night and week program, is also included. The room sensor supplied is installed separately.

A mean value can optionally be formed using 2 or 4 room sensors. Apart from continuously variable speed control, the fan speed can also be manually set. In addition, the control has a frost protection function, an external enable switch and a potential-free operating and collective fault alert, among other things. If required, the fan can also be used for pure air circulation without heating or cooling.

### Cabling

The following points need to be taken into account with the cabling and wiring diagrams below:

- ▶ Comply with the details on type of cable and cabling taking into consideration VDE 0100.
- ▶ Without \*: NYM-J. The requisite number of wires, including protective conductor, is stated on the cable. Cross-sections are not stated, as the cable length is involved in the calculation of the cross-section.
- ▶ With \*: J-Y(ST)Y 0.8 mm, max. 100 m between the speed controller and the last unit heater; provide a shield on one side when longer than 20 m. Lay separately from power lines.
- ▶ With \*\*: Sensor line 1.5 mm<sup>2</sup> e.g. J-Y(ST)Y, 4 x 2 x 0.8 mm, max. 100 m, lay separately from power lines.
- ▶ With \*\*\*: J-Y(ST)Y, 0.8 mm, max. 50 m, lay separately from power lines.
- ▶ With \*\*\*\*: J-Y(ST)Y, 0.8 mm, max. 100 m. Lay separately from power lines.
- ▶ If other types of cables are used, they must be at least equivalent.
- ▶ The terminals on the unit are suitable for a maximum wire cross-section of 2.5 mm<sup>2</sup>, the mains plug for max. 4.0 mm<sup>2</sup>.
- ▶ Any RCCBs used must be pulsating current-sensitive (type A). When the power supply to the unit is switched on, pulsating charging currents from the capacitors in the integral EMC filter can cause residual current protection devices to trip. We recommend the use of RCCBs with a tripping threshold of 300 mA.
- ▶ The electrical data listed in the following table needs to be considered when configuring the mains supply and fuses on site.

### Maximum number of connectible Ultra with EC fan per speed control unit


| Speed control unit |            |            |            |
|--------------------|------------|------------|------------|
| Type 30510         | Type 30155 | Type 30256 | Type 30515 |
| [Number]           | [Number]   | [Number]   | [Number]   |
| 10                 | 2          | 2          | 10         |

### Electrical data for Ultra, electromechanical model

| Unit heater type | Nominal voltage [V] | Mains frequency [Hz] | Active power [kW] | Nominal current [A] | Leakage current [mA] | Max. fuse [A] | IP protection rating | Protection class |
|------------------|---------------------|----------------------|-------------------|---------------------|----------------------|---------------|----------------------|------------------|
| 73xx58           | 230                 | 50/60                | 0.14              | 1.27                | < 3.5                | B10           | 54                   | I                |
| 84xx58           | 230                 | 50/60                | 0.14              | 1.27                | < 3.5                | B10           | 54                   | I                |
| 85xx58           | 230                 | 50/60                | 0.17              | 1.51                | < 3.5                | B10           | 54                   | I                |
| 96xx58           | 230                 | 50/60                | 0.46              | 2.13                | < 3.5                | C16           | 54                   | I                |
| 96xx56           | 230                 | 50/60                | 0.46              | 2.13                | < 3.5                | C16           | 54                   | I                |

xx Heat exchanger model


Cabling of Ultra (\*00), actuation by speed controller type 30510

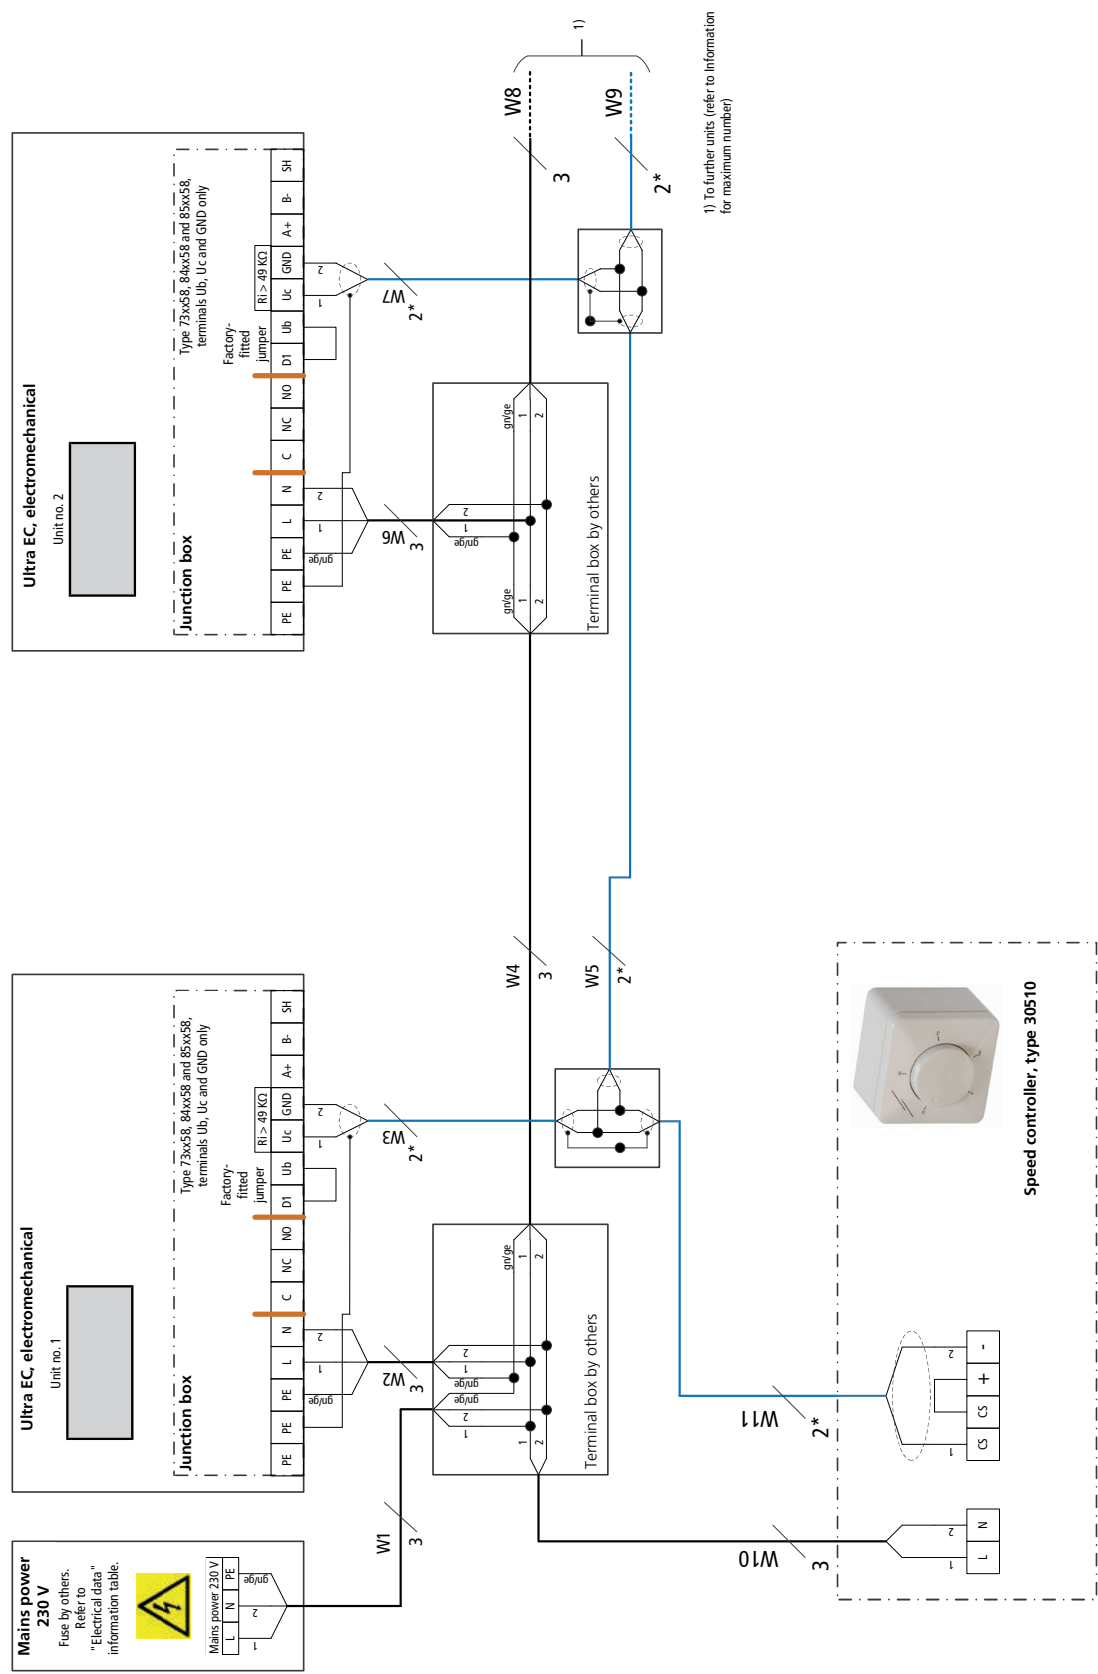







## Cabling of Ultra (\*\*00), actuation by speed controller type 30510 with room thermostat type 30055

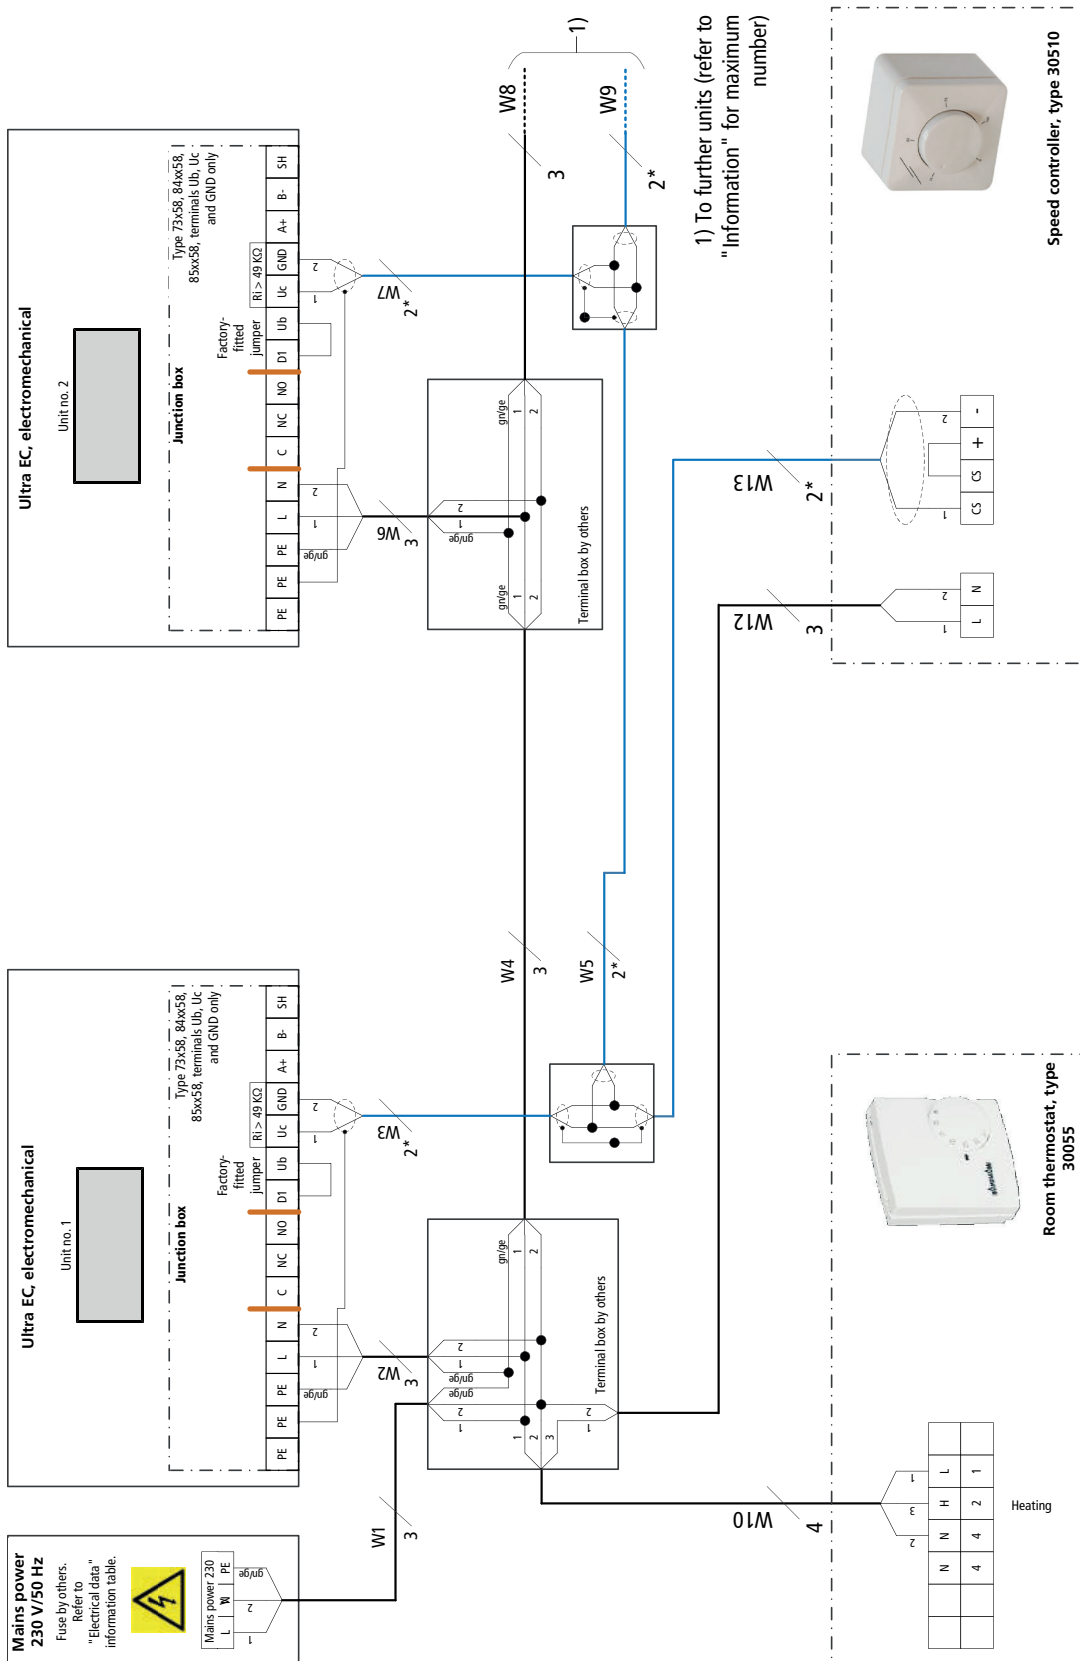


### Cabling of Ultra(\*\*00), actuation by speed controller type 30510 with clock thermostat type 30056

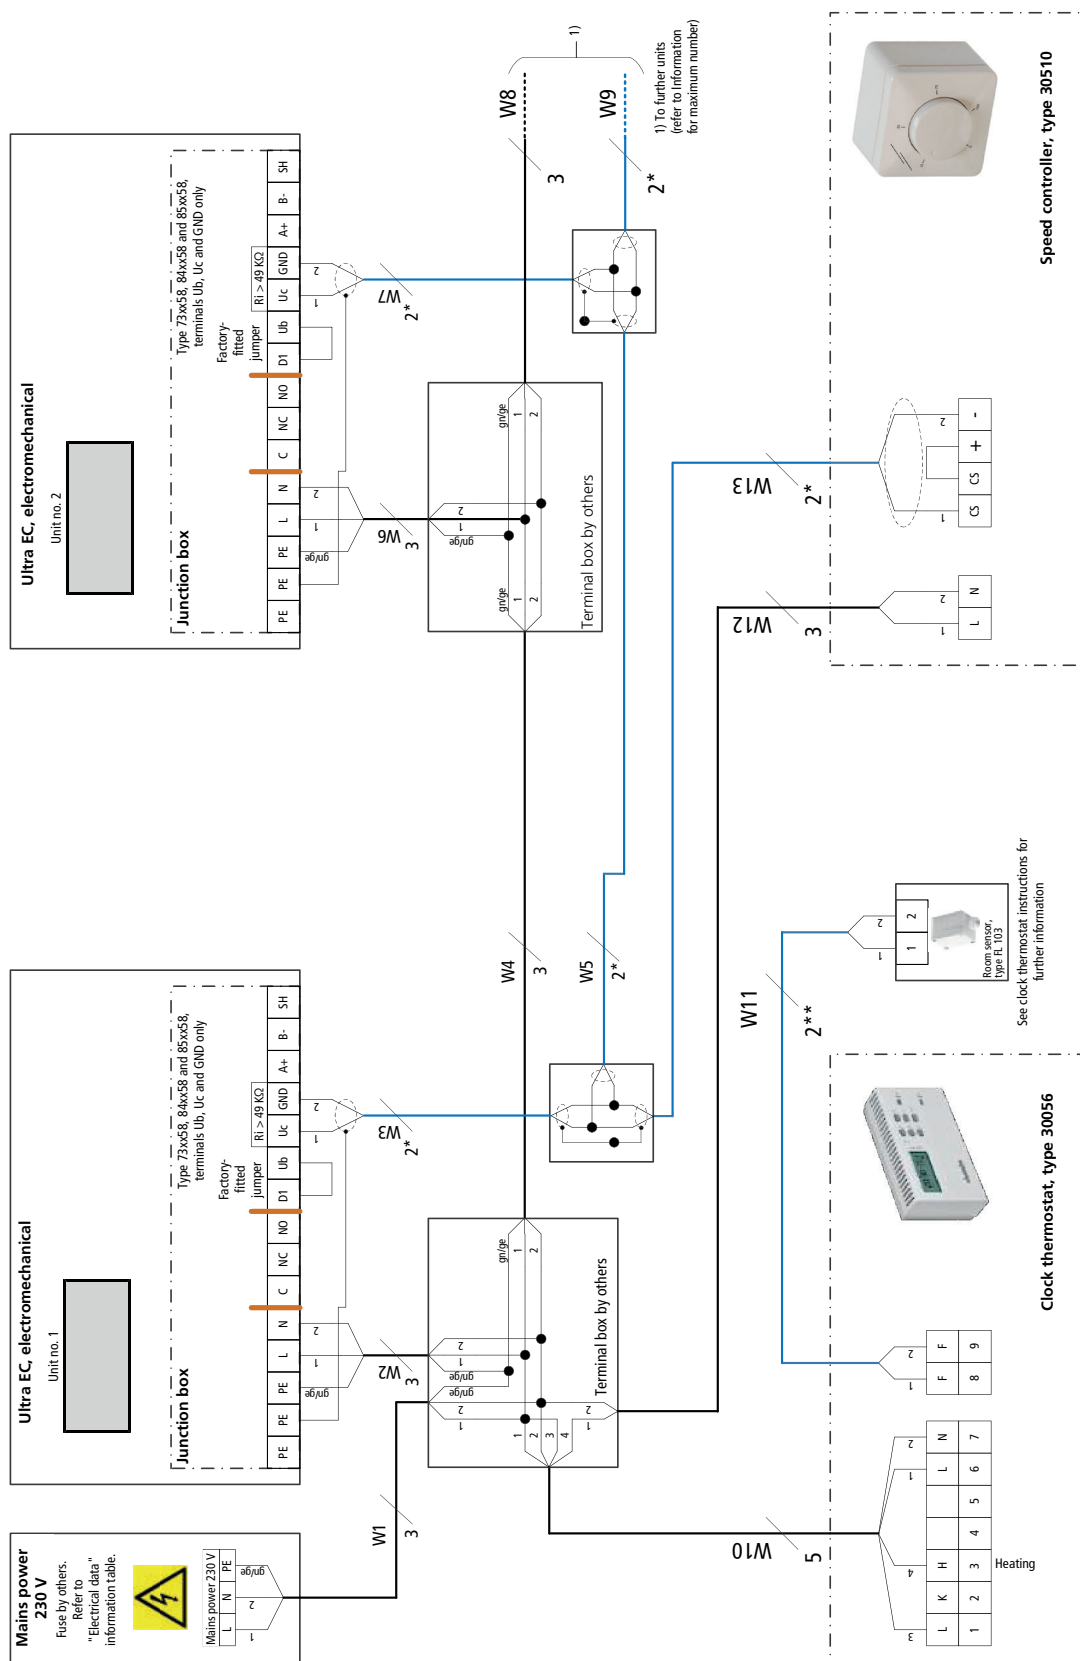

### Cabling of Ultra (\*\*00), actuation by climate controller type 30155, 2-pipe valve actuator 230 V AC, Open/Close

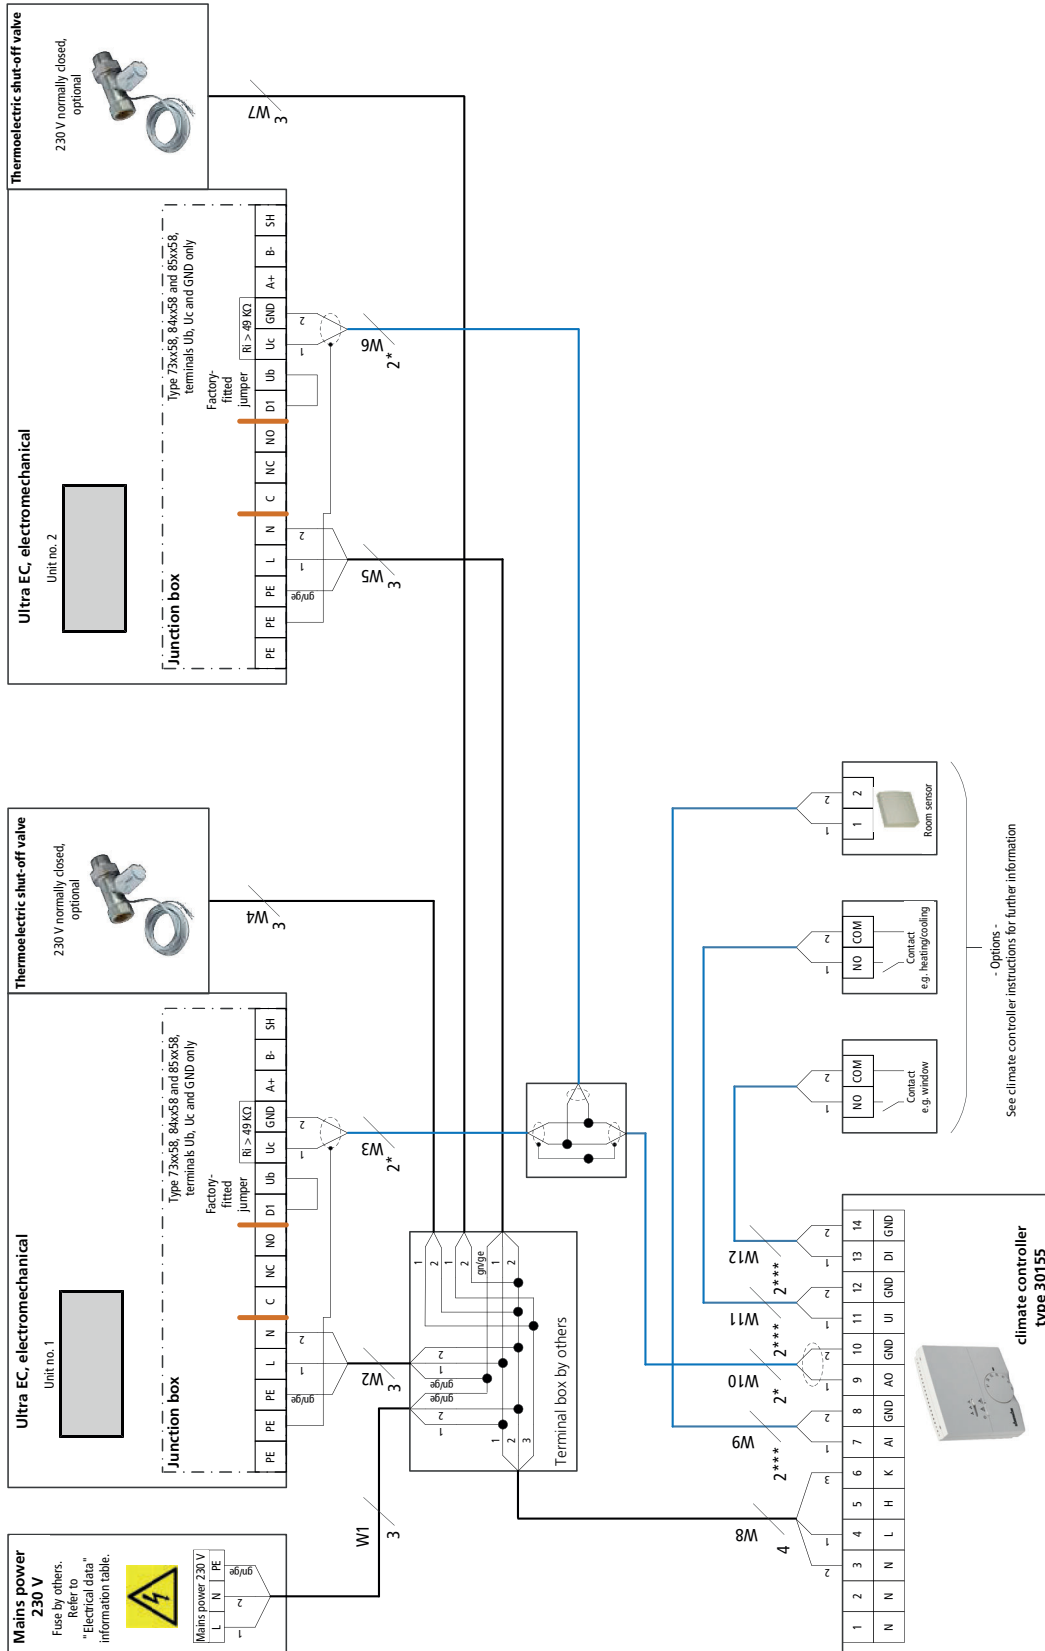


**Cabling of Ultra (\*\*00), actuation by climate controller type 30256, 2-pipe valve actuator 230 V AC, Open/Close**

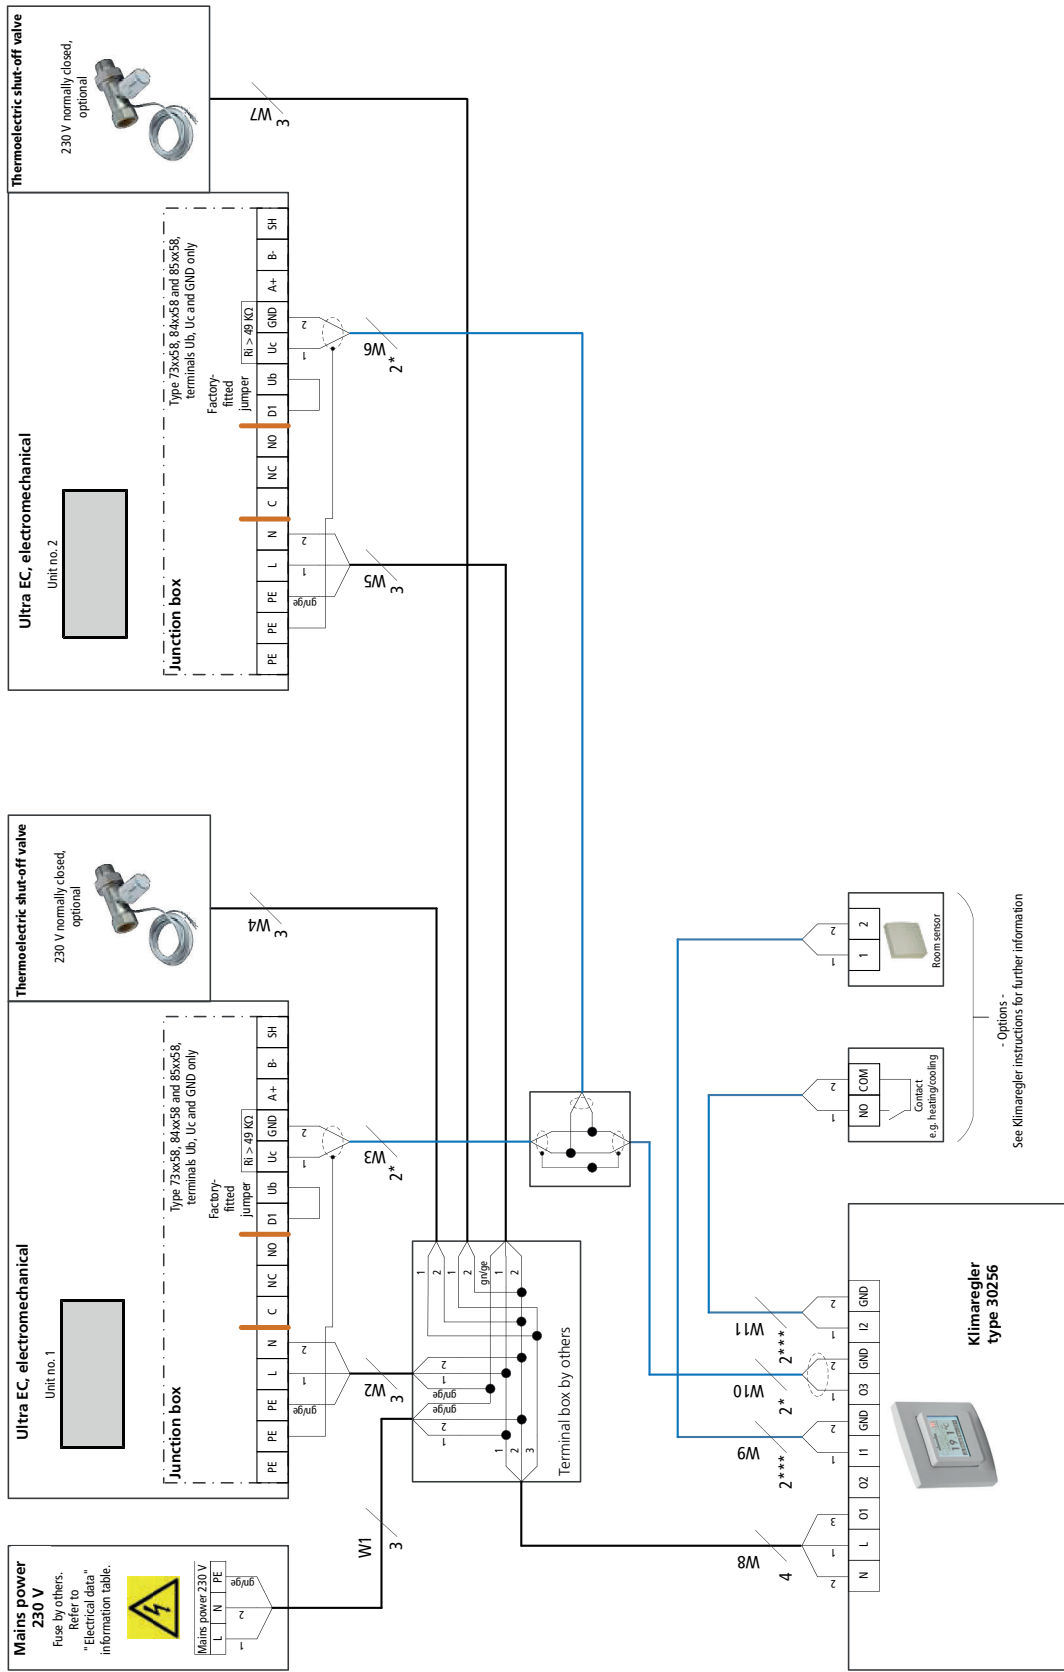



Cabling of Ultra (\*\*00), actuation by DDC/BMS, 2-pipe valve actuator 230 V AC, Open/Close

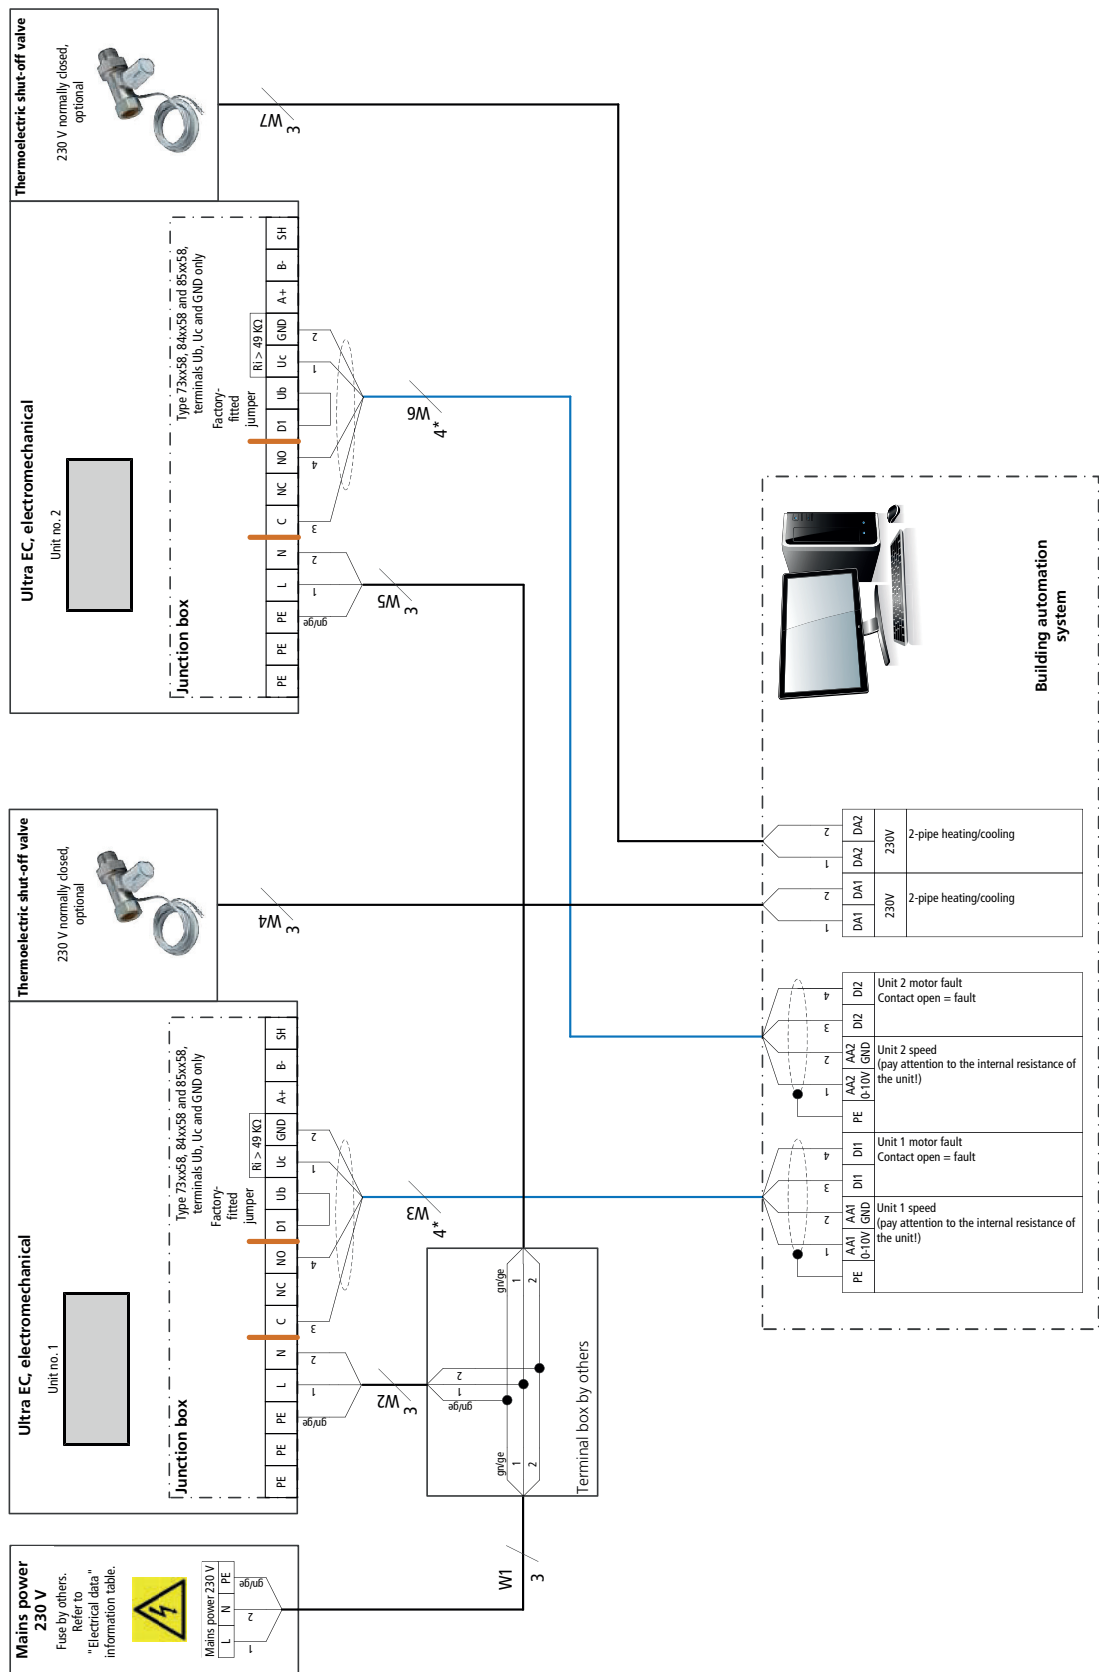



# Control of Ultra – KaControl model

## The all-inclusive solution!

### Product features

Units configured for operation with KaControl are fully wired and fitted with all electrical parts ready for connection (with the exception of optional accessories). The built-in, high-performance, parametrisable KaControl microprocessor control provides all the functions the Ultra needs.

The “face” of the KaControl is the KaController operating unit. A group of up to two units can be formed using a KaController unit without the need for additional addressing.

Optional plug-in interface cards offer the option of connecting to higher-level control systems.

### Fans

The speed of the EC fans used in the units is controlled by a 0-10 V DC signal from the KaControl. The “intelligent” motor electronics detects any possible motor fault and automatically switches off the fan. A motor fault on the unit to which the KaController is connected is displayed on the KaController.

### Control unit

Various versions of the KaController operating unit are available for operation and control.

### KaController

The KaController offers maximum operating convenience with a large display, one-touch operation and optionally also with side operating keys for quick access. Based on the principle of “as little as possible, as much as required”, even untrained users can intuitively get to grips with the control options.

The displays are language-independent using pictograms. The basic functions are inputted in a user-friendly way using the KaController.



Type 196003214002



Type 196003210001



Type 196003210002



Type 196003210006

**Product features of the KaController**

- ▶ plastic housing, colour similar to RAL 9010 (type 196003210001 and 196003210002) or black (type 196003210006) for surface-mounting on a flush back box or surface-mounting with a surface-mounted frame (accessory)
- ▶ high-quality design of room control units, large LCD multifunctional display with energy-saving, automatically switching LED backlight
- ▶ push-turn navigator dial with endless turn/lock function
- ▶ side function keys for quick access (only with type 196003210002)
- ▶ integral temperature sensor
  - Important!** the model in an industrial housing always needs a separate room temperature sensor
- ▶ individually adjustable basic display
- ▶ display of fault messages
- ▶ built-in weekly switching program
- ▶ password-protected parameter level

**KaControl**

The parametrisable KaControl microprocessor control offers a wealth of functions. The following default functions are factory-set for the Ultra product:

- ▶ 2-pipe applications, thermal valve actuators 24 V AC Open/Close, normally closed
- ▶ room temperature control with 2-point valve control and demand-led fan control in automatic mode or optionally fixed stage selection
- ▶ optional use of the internal or external room temperature sensor (accessory)
- ▶ in the event of an alarm being triggered on a device to which the KaController room control unit is connected, e.g. a motor fault is detected by the KaControl and indicated on the KaController control unit
- ▶ heating/cooling changeover control input with 2-pipe systems
- ▶ control input can either be set to Comfort/ECO or ON/OFF changeover
- ▶ switching output 24 V DC/max. 0.5 A parametrisable to unit alarm, heating or cooling demand (only with 2-pipe applications)
- ▶ sequential valve actuation (Open/Close) and fan speed via a data point
- ▶ 0-10 V DC only with actuation without KaController
- ▶ one slot for optional interface cards for connection to a higher-level building automation system – optionally Modbus, KNX, BACnet (accessory)
- ▶ password-protected parameter level
- ▶ parallel operation of a maximum of 2 units is possible, extendible to a maximum of 30 units using an additional CANbus card type 3260301 (accessory) per unit

Any additional functions required can be parametrised and correspondingly coordinated.

## Cabling

The following points need to be taken into account with the cabling and wiring diagrams below:


- ▶ Comply with the details on the type of cable and cabling, taking into consideration DE 0100.
- ▶ Without \*: NYM-J. The requisite number of wires, including protective conductor, is stated on the cable. Cross-sections are not stated, as the cable length is involved in the calculation of the cross-section.
- ▶ With \*: J-Y(ST)Y 0.8 mm. Lay separately from power lines.
- ▶ With \*\*: UNITRONIC BUS LD 0.22 mm<sup>2</sup>. Lay separately from power lines.
- ▶ If other types of cables are used, they must be at least equivalent.
- ▶ Length of BUS cable from the KaController to unit 1: max. 30 m.
- ▶ Maximum number of parallel units: 2 units. Maximum 30 units with a CANbus card type 3260301 (see Accessories) required for each unit and a terminal resistor on the first and last unit.
- ▶ Length of BUS cable from unit 1 to unit 2 max. 30 m. Max. 500 m with a CANbus card type 3260301 (see accessories) needed for each unit.
- ▶ Length of cable for room sensor and switching contact maximum 30 m, maximum 100 m from 1 mm<sup>2</sup>
- ▶ The terminals on the unit for the mains power supply are suitable for a maximum wire cross-section of 2.5 mm<sup>2</sup>.
- ▶ Any RCCBs used must be pulsating current-sensitive (type A). When the power supply to the unit is switched on, pulsating charging currents from the capacitors in the integral EMC filter can cause residual current protection devices to trip. We recommend the use of RCCBs with a tripping threshold of 300 mA.
- ▶ The electrical data listed in the following table needs to be considered when configuring the on-site mains power supply and fuses.

## Electrical data for Ultra, KaControl model


| Unit heater type | Nominal voltage [V] | Mains frequency [Hz] | Active power [kW] | Nominal current [A] | Leakage current [mA] | Max. fuse [A] | IP protection rating | Protection class |
|------------------|---------------------|----------------------|-------------------|---------------------|----------------------|---------------|----------------------|------------------|
| 84xx58C1         | 230                 | 50/60                | 0.14              | 1.27                | < 3.5                | B10           | 54                   | I                |
| 85xx58C1         | 230                 | 50/60                | 0.17              | 1.51                | < 3.5                | B10           | 54                   | I                |
| 96xx58C1         | 230                 | 50/60                | 0.46              | 2.13                | < 3.5                | C16           | 54                   | I                |
| 96xx56C1         | 230                 | 50/60                | 0.46              | 2.13                | < 3.5                | C16           | 54                   | I                |

Electrical data without KaControl and valve actuator  
xx Heat exchanger model


## Cabling of Ultra (\*C1), actuation by KaController type 321000x, 2-pipe, 24 V DC valve, Open/Close

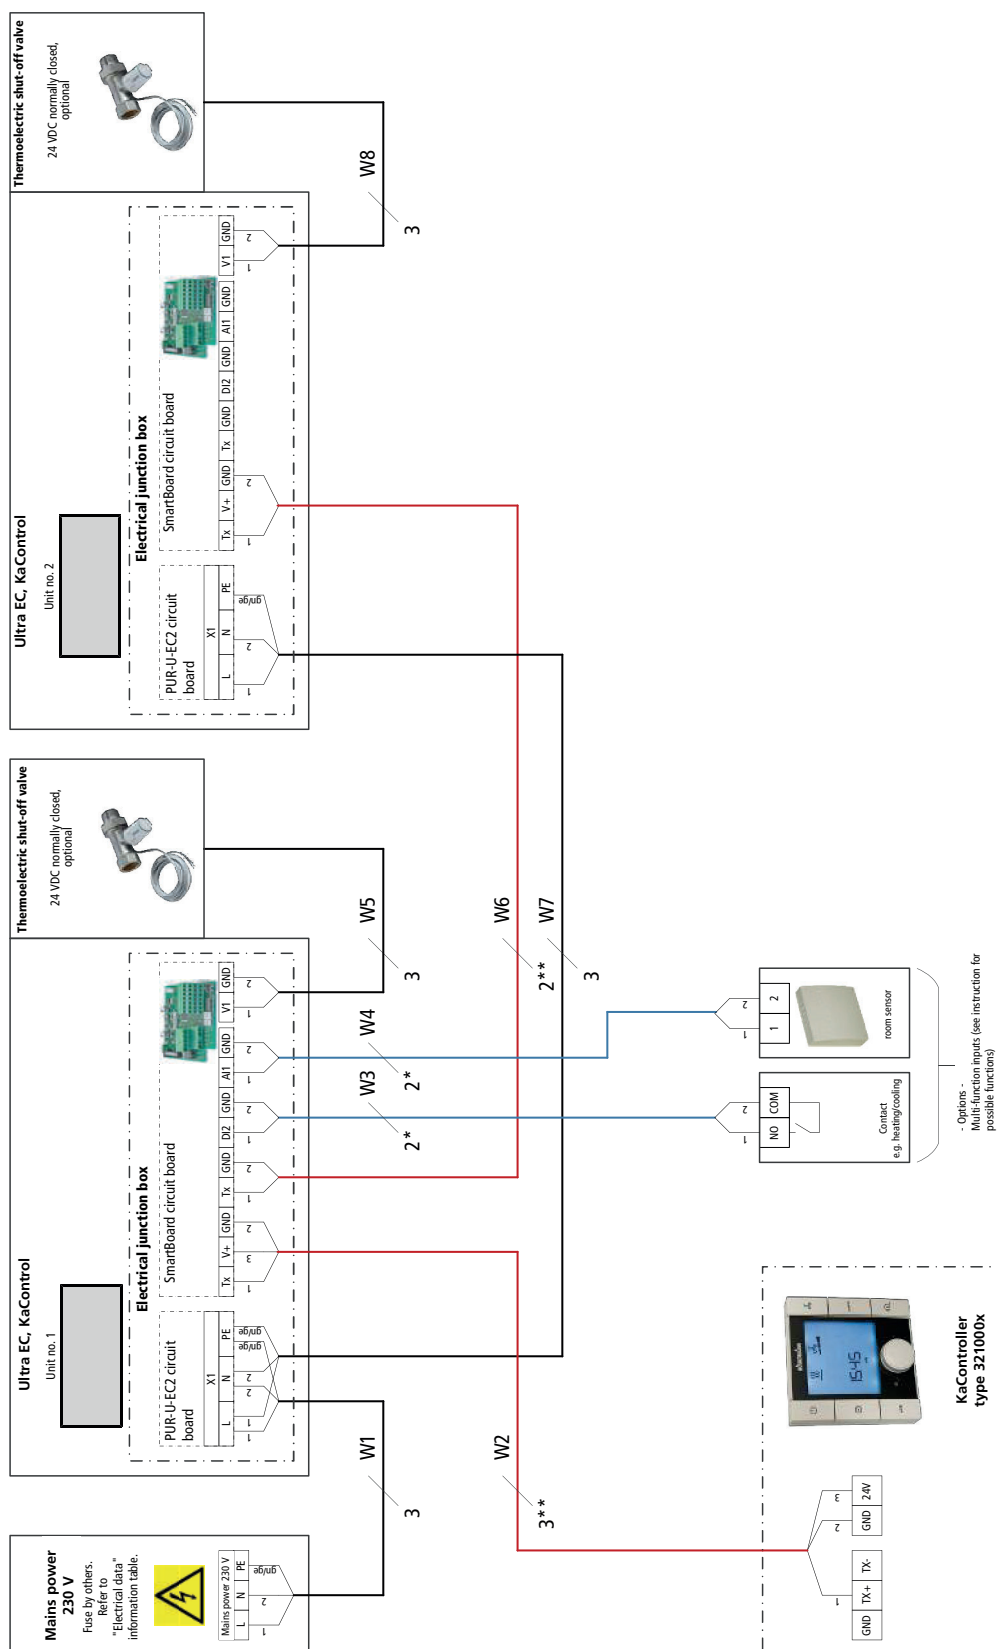

**Cabling of Ultra (\*C1), actuation by KaController type 321000x, 2-pipe, 24 V DC valve, Open/Close, with CANbus card**

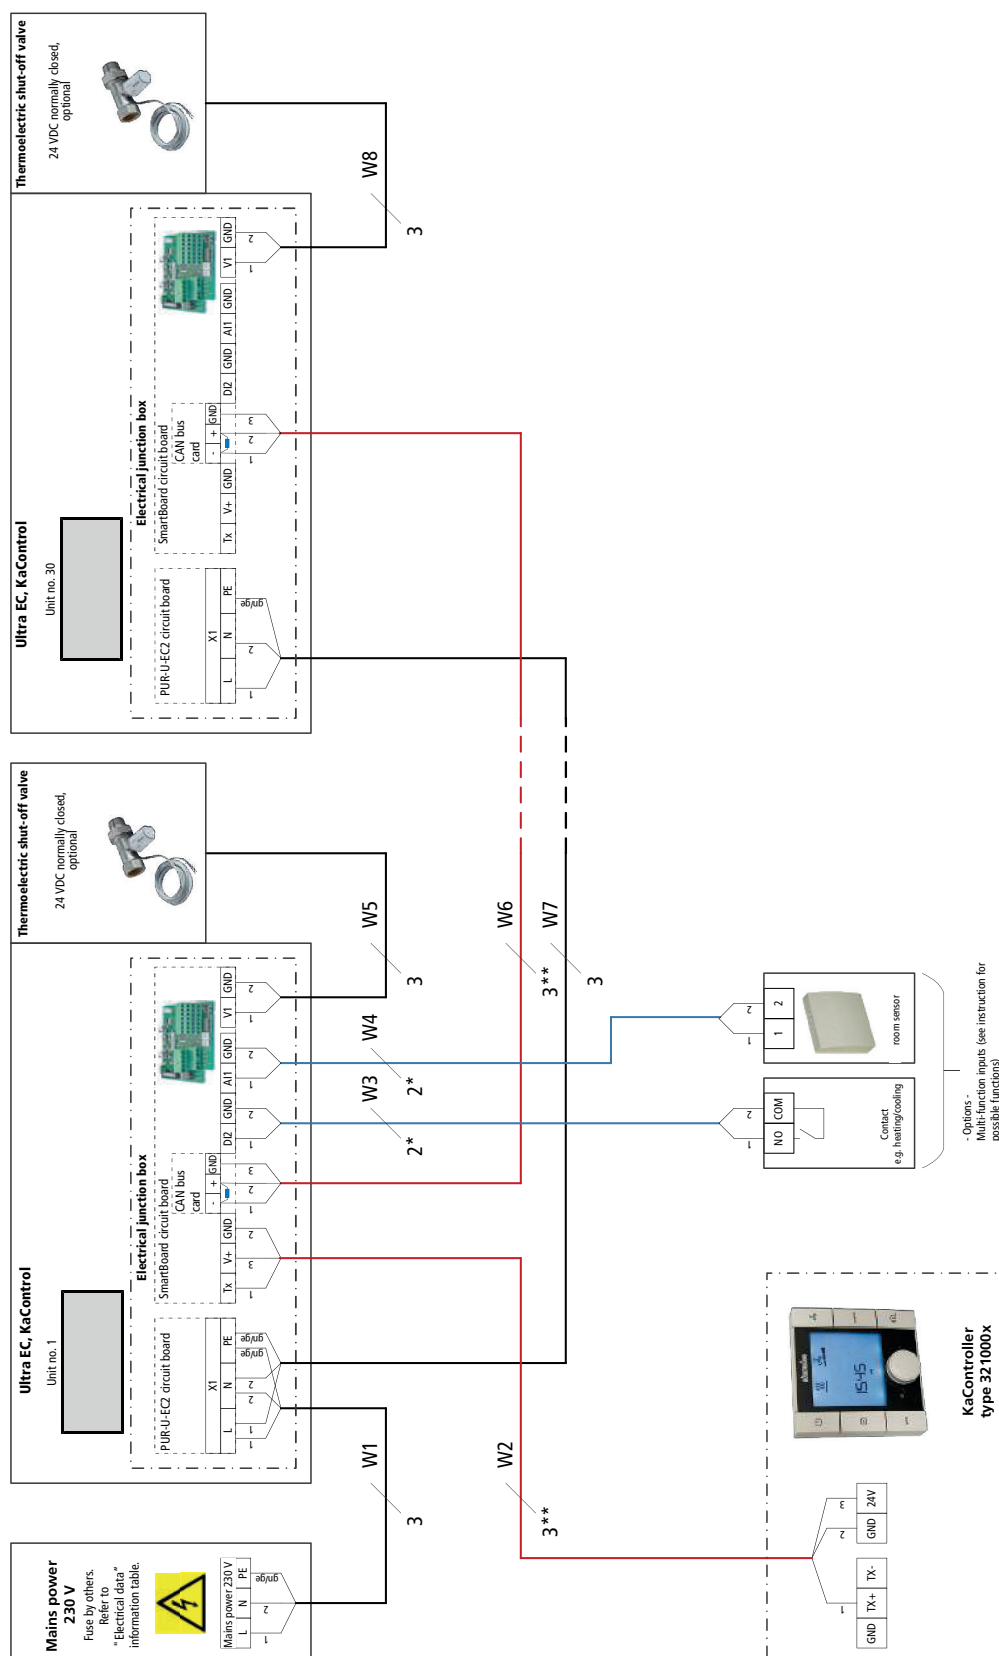

## Cabling of Ultra (\*C1), actuation by 0-10 V DC signal by others

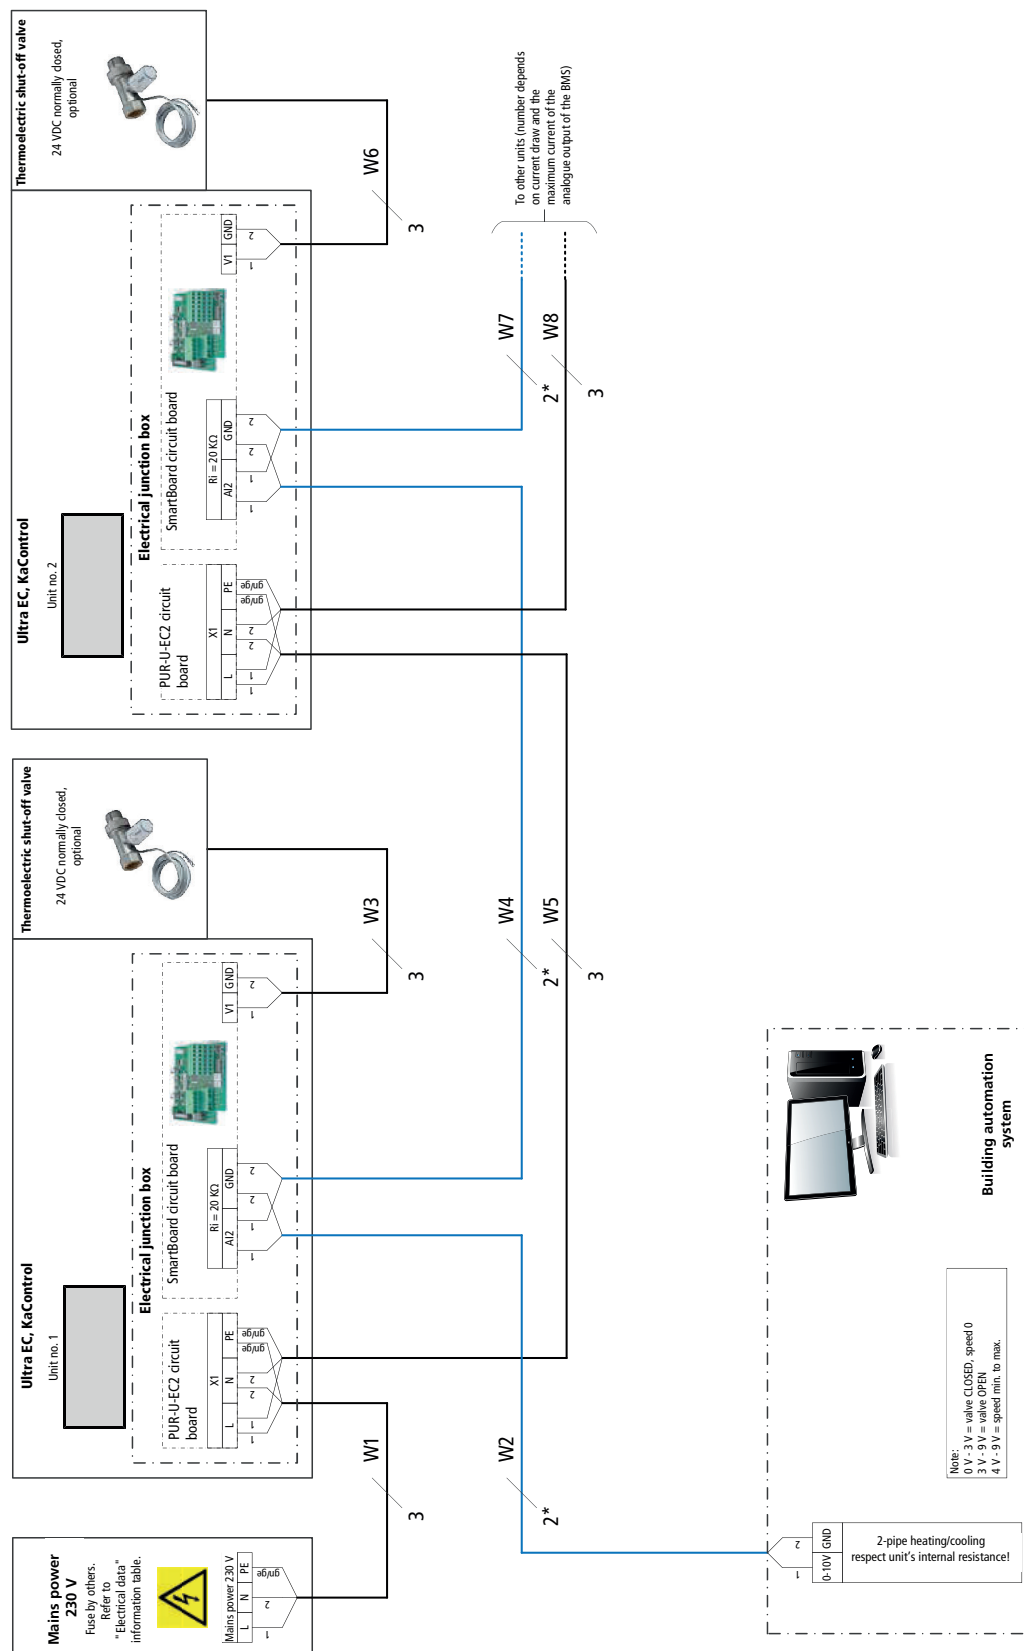



# KaControl – integration into intelligent building networks (IoT)

KaControl offers a wealth of options for integration into established communication networks. Various building automation strategies can be configured using different options.

## Individual switching of units

Units with KaControl configuration can be directly integrated into on-site networks using optional communication interfaces. Control and monitoring is provided by fixed data points. Operation is provided by the KaController or by the control units belonging to the network.

## Switching of groups

Up to six units with KaControl configuration can be operated in a single group. Groups of units can be directly integrated into on-site networks using optional communication interfaces. Control and monitoring is provided by fixed data points. Operation of a group is provided by the KaController or by control units belonging to the network.

## Communication interfaces

The following communication interfaces can be supplied separately or factory-fitted.

- ▶ Modbus RTU
- ▶ KNX
- ▶ BACnet IP

## Note:

More information on integration into intelligent building networks and the associated communication interfaces is available on request!

## KaControl – system controller

The optional Modbus interface allows units with KaControl configuration to be networked into systems individually or into groups with factory-programmed higher-level Kampmann system controllers.

### KaControl SEL control panel



- ▶ up to 60 secondary air units or door air curtains split into up to 24 groups (zones), identical units required within a group, up to 6 units per group
- ▶ optional: KaController is possible for each group
- ▶ central heating (winter)/cooling (summer) switch-over of secondary air units or heating (winter)/ventilation (summer)
- ▶ 5 timer programs can be assigned to groups
- ▶ optional: BACnet IP gateway for connection to higher-level control systems for the units/zones

### KaControl AUL control panel



- ▶ one Kampmann ventilation system
- ▶ up to 60 secondary air units or door air curtains divided into up to 10 groups (zones), identical units required within one group, up to 6 units per group
- ▶ optional: KaController unit for each group
- ▶ central heating (winter)/cooling (summer) switch-over of secondary air units or heating (winter)/ventilation (summer)
- ▶ 5 timer programs can be assigned to groups
- ▶ optional: BACnet IP gateway for connection to higher-level control systems for the units/zones

### KaControl visualisation



- ▶ up to 100/300 units
- ▶ optional: KaController unit for each group
- ▶ central heating (winter)/cooling (summer) changeover of secondary air units or heating (winter)/ventilation (summer) of door air curtains
- ▶ central timer programs
- ▶ visualisation of Kampmann secondary air units, door air curtains and ventilation systems

#### Note:

More information on KaControl system controllers can be provided on request!



# 05 ▶ Ordering information

## Ultra

| Fan version | Model size | Length | Width | Height | Heat exchanger performance | Control option | Article no. |
|-------------|------------|--------|-------|--------|----------------------------|----------------|-------------|
|             |            | [mm]   | [mm]  | [mm]   |                            |                |             |

### Heat exchanger model copper/aluminium

|                           |    |     |      |     |                                   |  |                |
|---------------------------|----|-----|------|-----|-----------------------------------|--|----------------|
| EC fan, 230 V, high speed | 73 | 750 | 840  | 330 | 2-row, heat exchanger code no. 20 | electromechanical                                  | 154000732058   |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540007320580R |
|                           |    |     |      |     | 3-row, heat exchanger code no. 30 | electromechanical                                  | 154000733058   |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540007330580R |
| EC fan, 230 V, high speed | 84 | 900 | 1004 | 330 | 2-row, heat exchanger code no. 20 | electromechanical                                  | 154000842058   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000842058F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008420580R |
|                           |    |     |      |     |                                   | KaControl  | 154000842058C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000842058FR |
|                           |    |     |      |     | 3-row, heat exchanger code no. 30 | electromechanical                                  | 154000843058   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000843058F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008430580R |
|                           |    |     |      |     |                                   | KaControl  | 154000843058C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000843058FR |
|                           |    |     |      |     | 3-row, heat exchanger code no. 31 | electromechanical                                  | 154000843158   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000843158F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008431580R |
|                           |    |     |      |     |                                   | KaControl  | 154000843158C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000843158FR |
| EC fan, 230 V, high speed | 85 | 900 | 1004 | 330 | 2-row, heat exchanger code no. 20 | electromechanical                                  | 154000852058   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000852058F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008520580R |
|                           |    |     |      |     |                                   | KaControl  | 154000852058C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000852058FR |
|                           |    |     |      |     | 3-row, heat exchanger code no. 30 | electromechanical                                  | 154000853058   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000853058F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008530580R |
|                           |    |     |      |     |                                   | KaControl  | 154000853058C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000853058FR |
|                           |    |     |      |     | 4-row, heat exchanger code no. 40 | electromechanical                                  | 154000854058   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000854058F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008540580R |
|                           |    |     |      |     |                                   | KaControl  | 154000854058C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000854058FR |
|                           |    |     |      |     | 3-row, heat exchanger code no. 31 | electromechanical                                  | 154000853158   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000853158F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008531580R |
|                           |    |     |      |     |                                   | KaControl  | 154000853158C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000853158FR |
|                           |    |     |      |     | 4-row, heat exchanger code no. 41 | electromechanical                                  | 154000854158   |
|                           |    |     |      |     |                                   | electromechanical with frost protection thermostat | 154000854158F0 |
|                           |    |     |      |     |                                   | electromechanical with repair switch               | 1540008541580R |
|                           |    |     |      |     |                                   | KaControl  | 154000854158C1 |
|                           |    |     |      |     |                                   | frost protection thermostat and repair switch      | 154000854158FR |

CONTINUED ▶









# Ultra

| Fan version               | Model size | Length | Width | Height | Heat exchanger performance        | Control option                                     | Article no.    |
|---------------------------|------------|--------|-------|--------|-----------------------------------|--|----------------|
|                           |            | [mm]   | [mm]  | [mm]   |                                   |  |                |
| EC fan, 230 V, high speed | 96         | 1050   | 1177  | 330    | 2-row, heat exchanger code no. 20 | electromechanical                                  | 154000962058   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000962058F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000962058OR |
|                           |            |        |       |        |                                   | KaControl  | 154000962058C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000962058FR |
|                           |            |        |       |        | 3-row, heat exchanger code no. 30 | electromechanical                                  | 154000963058   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000963058F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000963058OR |
|                           |            |        |       |        |                                   | KaControl  | 154000963058C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000963058FR |
|                           |            |        |       |        | 4-row, heat exchanger code no. 40 | electromechanical                                  | 154000964058   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000964058F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000964058OR |
|                           |            |        |       |        |                                   | KaControl  | 154000964058C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000964058FR |
|                           |            |        |       |        | 3-row, heat exchanger code no. 31 | electromechanical                                  | 154000963158   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000963158F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000963158OR |
|                           |            |        |       |        |                                   | KaControl  | 154000963158C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000963158FR |
|                           |            |        |       |        | 4-row, heat exchanger code no. 41 | electromechanical                                  | 154000964158   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000964158F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000964158OR |
|                           |            |        |       |        |                                   | KaControl  | 154000964158C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000964158FR |
| EC fan, 230 V, low speed  | 96         | 1050   | 1177  | 330    | 2-row, heat exchanger code no. 20 | electromechanical                                  | 154000962056   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000962056F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000962056OR |
|                           |            |        |       |        |                                   | KaControl  | 154000962056C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000962056FR |
|                           |            |        |       |        | 3-row, heat exchanger code no. 30 | electromechanical                                  | 154000963056   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000963056F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000963056OR |
|                           |            |        |       |        |                                   | KaControl  | 154000963056C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000963056FR |
|                           |            |        |       |        | 4-row, heat exchanger code no. 40 | electromechanical                                  | 154000964056   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000964056F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000964056OR |
|                           |            |        |       |        |                                   | KaControl  | 154000964056C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000964056FR |
|                           |            |        |       |        | 3-row, heat exchanger code no. 31 | electromechanical                                  | 154000963156   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000963156F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000963156OR |
|                           |            |        |       |        |                                   | KaControl  | 154000963156C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000963156FR |
|                           |            |        |       |        | 4-row, heat exchanger code no. 41 | electromechanical                                  | 154000964156   |
|                           |            |        |       |        |                                   | electromechanical with frost protection thermostat | 154000964156F0 |
|                           |            |        |       |        |                                   | electromechanical with repair switch               | 154000964156OR |
|                           |            |        |       |        |                                   | KaControl  | 154000964156C1 |
|                           |            |        |       |        |                                   | frost protection thermostat and repair switch      | 154000964156FR |

## Accessories



| Article | Article | Properties | Dimensions | Suitable for | Article no. |
|---------|---------|------------|------------|--------------|-------------|
|         |         |            | [mm]       |              |             |

### Control accessories KaControl





|   |  |  |                 |   |                     |
|---|--|--|-----------------|---|---------------------|
|    | KaController   | with one-button operation, 24 V wall-mounted room control unit, with integral room temperature sensor, Colour similar to RAL 9010 pure white   | 86 x 52 x 86    | all units with control option KaControl -C1                               | <b>196003210001</b> |
|    | KaController   | with one-button operation, 24 V wall-mounted room control unit, with integral room temperature sensor, Colour similar to RAL 9017 traffic black  | 86 x 52 x 86    | all units with control option KaControl -C1                               | <b>196003210006</b> |
|    | KaController   | with side operating keys, 24 V wall-mounted room control unit, with integral room temperature sensor, Colour similar to RAL 9010 pure white  | 86 x 52 x 86    | all units with control option KaControl -C1, ProtecTor Door Air Curtains  | <b>196003210002</b> |
|  | Industry KaController                                    | with side operating keys, industrial housing with hinged transparent cover, lockable, Surface-mounted, Protection class IP 65  | 200 x 110 x 195 | all units with control option KaControl -C1, ProtecTor Door Air Curtains  | <b>196003214002</b> |
|  | Room temperature sensor                                  | Wall-mounted, Surface-mounted, Protection class IP 30, Colour RAL 9010 pure white<br>Is the KaController installation site suitable for a temperature measurement? - If it is not suitable, e.g. behind a curtain, then a KaControl room temperature sensor should be chosen for each group! | 85 x 25 x 85    | all units with KaControl -C1 and climate controller art. no. 19600014894* | <b>196003250110</b> |
|  | Outside temperature sensor/industrial temperature sensor | Surface-mounted, Protection class IP 65, Colour similar to RAL 9010 pure white   | 63 x 68 x 57    | all units with control option KaControl -C1, ProtecTor Door Air Curtains  | <b>196003250112</b> |
|  | Clip-on pipe sensor                                      | to detect the medium temperature, heating/cooling changeover function only in conjunction with 3-way valve!<br>Is there a risk of frost, e.g. due to the ingress of cold air – if so, then a KaControl clip-on pipe sensor should be chosen for each unit!                                   | 5 x 6 x 3000    | all units with control option KaControl -C1                               | <b>196003250115</b> |
|  | Serial KNX card  | for integration into a KNX/EIB network, interface PCOS00KXN0, Protection class IP 0  | 35 x 20 x 80    | all units with control option KaControl -C1                               | <b>196003260702</b> |

CONTINUED ►

## Accessories

| Article   | Article            | Properties  | Dimensions   | Suitable for                                | Article no.         |
|---|--------------------|---|--------------|---|---------------------|
|   |                    |   | [mm]         |   |                     |
|  | Serial CANbus card | to increase the number of units in a single-circuit system from 7 to a maximum of 30 units, one required per unit, Extension of the cable length from the first to the last unit from 30 m to 500 m | 35 x 30 x 60 | all units with control option KaControl -C1 | <b>196003260301</b> |
|  | Serial Modbus card | Required for each device for connection to KaControl panels or on-site Modbus networks.   | 31 x 12 x 61 | all units with control option KaControl -C1 | <b>196003260101</b> |

### Control accessories electromechanical 230 V

|   |                             |  |                 |  |                     |
|---|-----------------------------|--|-----------------|--|---------------------|
|   | Room thermostat             | Heating/Cooling, 2- and 4-pipe, 3-stage. Only in conjunction with valves/valve kits with actuator, 230 V AC, Open/Closed, with OFF/Manual/Automatic fan switch-over, Surface-mounted                               | 110 x 111 x 26  | EC units electromechanical, 5 Katherm HK Trench Technology, 2 TOP or Ultra Unit Heaters, 2 Venkon, KaCool D AF or KaCool W Fan Coils   | <b>196000030155</b> |
|  | Clock thermostat            | Heating/Cooling, 2- and 4-pipe, continuously variable, with LCD operating menu and integrated timer program, 230 V AC, flush-mounted   | 85 x 46 x 81    | EC units electromechanical, 2 TOP or Ultra Unit Heaters, 5 Venkon Fan Coils, 2 KaCool D AF or KaCool W Fan Coils   | <b>196000030256</b> |
|  | Speed controller            | continuously variable fan operation, 0-100% presettable, 230 V AC, 10 V, 0-100%, On/Off via room thermostat, surface-mounted protection class IP 54, flush-mounted protection class IP 44                          | 82 x 82 x 68    | EC units electromechanical, 2 ProtecTor Door Air Curtains, 5 UniLine or Tandem Door Air Curtains, 10 TOP or Ultra Unit Heaters, 10 Venkon Fan Coils, 2 KaCool D AF or KaCool W Fan Coils | <b>196000030510</b> |
|  | Electronic speed controller | with integral digital timer, 230 V AC, with day, night, week programme, continuously variable fan operation 0 to 100 %, manual or automatic, 0-10 VDC, recirculation air, including sensor, Protection class IP 40 | 262 x 277 x 153 | EC units electromechanical, 10 TIP, TOP or Ultra Unit Heaters, 10 Venkon Fan Coils, 2 KaCool D AF or KaCool W Fan Coils  | <b>196000030515</b> |





CONTINUED ►






## Accessories

| Article | Article | Properties | Dimensions | Suitable for | Article no. |
|---------|---------|------------|------------|--------------|-------------|
|         |         |            | [mm]       |              |             |

### Thermostats

|   |                       |  |                |   |                     |
|---|-----------------------|--|----------------|---|---------------------|
|    | Room thermostat       | with thermal feedback, 230 V AC, Surface-mounted, Protection class IP 30                               | 78 x 28 x 83   | Unit Heaters, Galaxis Radiant Ceiling Panels                              | <b>196000030055</b> |
|    | Industrial thermostat | with setpoint adjustment by tool, Protection class IP 54   | 113 x 71 x 158 | Unit Heaters, ProtecTor Door Air Curtains, Galaxis Radiant Ceiling Panels | <b>196000030058</b> |
|   | Industrial thermostat | with setpoint adjustment using a dial, Protection class IP 54  | 113 x 71 x 158 | Unit Heaters, ProtecTor Door Air Curtains, Galaxis Radiant Ceiling Panels | <b>196000030059</b> |
|  | Clock thermostat      | with integral digital timer, with day/night/week programme, with night setback, Protection class IP 20 | 84 x 33 x 133  | Unit Heaters, Galaxis Radiant Ceiling Panels                              | <b>196000030056</b> |

### Valves


|   |                               |   |                 |   |                     |
|---|-------------------------------|---|-----------------|---|---------------------|
|  | Thermoelectric shut-off valve | 230 V AC, Connection 1" Not in conjunction with 2-stage three-phase switch art. no. 196000030049! | 200 x 50 x 300  | all unit heaters  | <b>196000030911</b> |
|  | Thermoelectric shut-off valve | 24 V AC/DC, Connection 1"   | 200 x 50 x 300  | Only to be used with KaControl!   | <b>196000030931</b> |
|  | Control shut-off valve        | 230 V AC, DN 20, Connection 1"  | 140 x 120 x 140 | Model size 4 - 5, TOP or Ultra Unit Heaters, Flow volume (min./max.) 180 - 1300 l/h | <b>196000030950</b> |
|   |                               | 230 V AC, DN 25, Connection 1"  | 140 x 120 x 140 | Model size 4 - 6, TOP or Ultra Unit Heaters, Flow volume (min./max.) 300 - 2000 l/h | <b>196000030951</b> |
|   |                               | 24 V AC/DC, DN 20, Connection 1"  | 140 x 120 x 140 | Model size 4 - 5, TOP or Ultra Unit Heaters, Flow volume (min./max.) 180 - 1300 l/h | <b>196000030980</b> |
|   |                               | 24 V AC/DC, DN 25, Connection 1"  | 140 x 120 x 140 | Model size 4 - 6, TOP or Ultra Unit Heaters, Flow volume (min./max.) 300 - 2000 l/h | <b>196000030981</b> |

CONTINUED ▶


## Accessories

| Article | Article | Properties | Dimensions | Suitable for | Article no. |
|---------|---------|------------|------------|--------------|-------------|
|         |         |            | [mm]       |              |             |


### Repair switch

|   |               |   |               |   |                     |
|---|---------------|---|---------------|---|---------------------|
|  | Repair switch | EC, Enables individual units in a switching group to be decommissioned by voltage disconnection. The thermal contacts are bridged in advance, and subsequently opened on the motor side so that the other units in the group can continue to operate without interruption., Protection class IP 65, 25 A, supplied separately | 82 x 127 x 82 | all unit heaters, air curtains with EC-motors | <b>196000030160</b> |
|---|---------------|---|---------------|---|---------------------|






### Filter

|   |                                  |  |                |                    |                     |
|---|----------------------------------|--|----------------|--------------------|---------------------|
|  | Recirculating air filter element | for direct mounting on the unit inlet with recirculation air units, ISO Coarse 45% (G3) filter<br>Cannot be used with under-ceiling units! | 405 x 70 x 405 | Model size 73 - 84 | <b>154000064050</b> |
|   |                                  |  | 505 x 95 x 505 | Model size 85      | <b>154000065050</b> |
|   |                                  |  | 655 x 90 x 655 | Model size 96      | <b>154000066050</b> |

### Panel/grille

|   |                          |   |                |                    |                     |
|---|--------------------------|---|----------------|--------------------|---------------------|
|  | Recirculating air grille | Grid dimensions 625 x 625 mm, powder coated Colour RAL 9016 traffic-white | 620 x 18 x 620 | Model size 73 - 96 | <b>154000060988</b> |
|---|--------------------------|---|----------------|--------------------|---------------------|

### Components for installation in acoustic grid suspended ceilings

|   |   |  |                  |                    |                       |
|---|---|--|------------------|--------------------|-----------------------|
|  | Connection frame                                      | square   | 600 x 160 x 600  | Model size 85      | <b>198000065002</b>   |
|   |   |  | 700 x 160 x 700  | Model size 96      | <b>198000066002</b>   |
|  | Reducing angle 90°                                    | extended, square to rectangular  | 610 x 350 x 1145 | Model size 85      | <b>198000065104</b>   |
|   |   |  | 1220 x 375 x 700 | Model size 96      | <b>198000066104</b>   |
|  | Air inlet angled section, 90°                         | with air intake grille, mounting for filter insert, ISO Coarse 45% (G3) filter   | 700 x 429 x 1175 | Model size 85 - 96 | <b>198000060105</b>   |
|   | 90° air intake bend with differential pressure switch | with intake grille, filter insert and differential pressure switch for filter monitoring, ISO Coarse 45% (G3) filter, factory-fitted | 700 x 430 x 1165 | Model size 85 - 96 | <b>198000060105D0</b> |
|  | Filter insert   | complete with filter, ISO Coarse 45% (G3) filter   | 569 x 18 x 590   | Model size 85 - 96 | <b>198000060126</b>   |
|  | Replacement filter                                    | for filter insert, ISO Coarse 45% (G3) filter, 1 set = 5 piece(s)  | 560 x 70 x 580   | Model size 85 - 96 | <b>198000060127</b>   |

[Kampmanngroup.com/ultra](https://Kampmanngroup.com/ultra)

Subject to technical changes. 405/01.2023 UK

**Kampmann GmbH & Co. KG**  
Friedrich-Ebert-Str. 128 - 130  
49811 Lingen (Ems)  
Germany

**T** +49 591 7108-660  
**F** +49 591 7108-173  
**E** [export@kampmann.de](mailto:export@kampmann.de)  
**W** [Kampmanngroup.com](https://Kampmanngroup.com)

